

## About Product

PASHA generator sets are designed to be used as backup or continuous power supply. They are subjected to detailed load and performance tests in our production facilities in order to provide ideal performance and safe usage.



## Power Output Values



Voltage	Standby Power (ESP)			Prime Power (PRP)		
	kVA	kW	Ampere	kVA	kW	Ampere
400/231	<b>550 kVA</b>	440 kW	795	<b>500 kVA</b>	400 kW	722,5

**Standby Power (ESP)** : This rating is for the supply of continuous electrical power at variable load , in the event of utility power failure. No overload is permitted.

**Prime Power (PRP)** : This rating is for the supply of continuous electrical power at variable load. There is no limitation on the annual hours in operation and 10% overload power can be supplied for 1 hour in 12.

## Weight And Dimensions

Type	Width x Length x Height (mm)	Weight (kg)	Fuel Tank (Lt)	Sound dB(A) @1mt
Open	1700x3800x2000 mm	3900 kg	600 lt	-
Soundproofed	1700x4800x2500 mm	4500 kg	600 lt	83

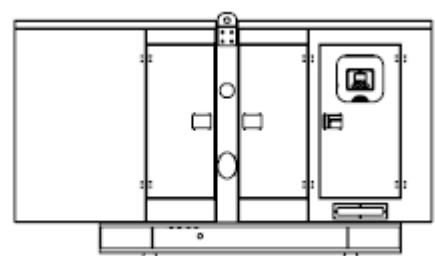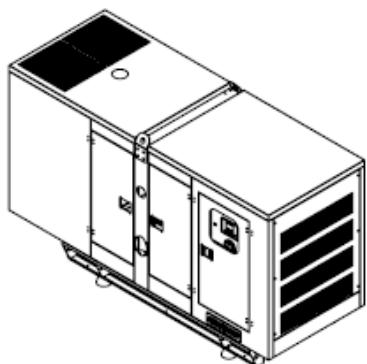

## Engine



Frequency		50 Hz
Output Rating	kW	510
Manufacturer and Model		12V510TAD
Fuel		Diesel
Injection		Direct
Aspiration		Turbocharged & Intercooled
Cylinders		12
Bore and Stroke	mm	135 x 150
Displacement	lt	25,8
Cooling		Water
Engine Oil Specification		SAE 15W40
Compression Ratio		16
Engine Oil Capacity	lt	42
Coolant Capacity (incl.radiator)	lt	108
Governor		Electronical
Air Filter		Dry element
<b>FUEL CONSUMPTION</b>		
100 % Load	lt/h	110,5
75 % Load	lt/h	85
50 % Load	lt/h	56,6
<b>EXHAUST SYSTEM</b>		
Maximum Temperature	°C	600
Exhaust Gas Flow	m³/min	160
Maximum Allowed Back Pressure	kPa	6
Exhaust Flange Size (Internal Dia.)	mm	110
<b>AIR SYSTEM</b>		
Intake Air Flow	m³/min	50
Total Cooling Air Flow	m³/min	965
<b>STARTING SYSTEM</b>		
Starter Motor	kW	11
Battery Capacity	Ah	2x120
Auxiliary Voltage	V	24

## Alternator

Poles	4 pole
Winding Connections	Star
Insulation	Class H
Enclosure	IP23
Exciter System	Self regulating Brushless
Voltage Regulator	AVR
Steady State Voltage Regulation	± 1 %
Bearing	Single bearing sealed
Coupling	Flexible disc
Cooling	Direct drive centrifugal blower fan

## Control Panel IDP300

The new IDP300 genset controller is a cost effective modular genset controller ready for internet monitoring through plug-in modules.

Its main advantages are multifunctionality, support for multiple topologies, harmonic analysis and detailed power measurements.

Software features are complete with easy firmware upgrade through USB port. The Windows based PC software allows monitoring and programming through USB, RS-485, RS-232, Ethernet and GPRS.

The Rainbow Scada web service allows monitoring and control of an unlimited number of gensets from a single central location.



## Optional Equipments

Some Optional Equipment PASHA Provides with Generator Sets;

- Remote radiator applications,
- Automatic fuel filling system,
- Fuel tank, oil pan, instrument panel, alternator, coil heaters,
- Synchronization systems,
- Generator output fuse,
- Mains generator transfer switches,
- Seismic solutions,
- Remote monitoring
- Other requested solutions

## Reference Standards

PASHA Generator Sets are CE approved and comply with the following standards;

- Power according to ISO 3046 and ISO 8528
- EN 12100 , EN 13857 , EN 60204
- 2006/42/CE Machinery Safety
- 2006/95/EC Low Voltage
- 2004/108/CE EMC
- Ambient reference conditions 1000 mbar, 25 °C, 30 % relative humidity ISO8528

PASHA the information in this leaflet is intended for general purposes only. PASHA reserves the right to change the specifications without notice.