



IZEM
EXPORT & IMPORT COMPANY


Towel Rails



- Towel Warmers
- Electric Towel Warmers
- Thermostatic Electric Towel Warmers
- Elements

Riva

Towel Warmers

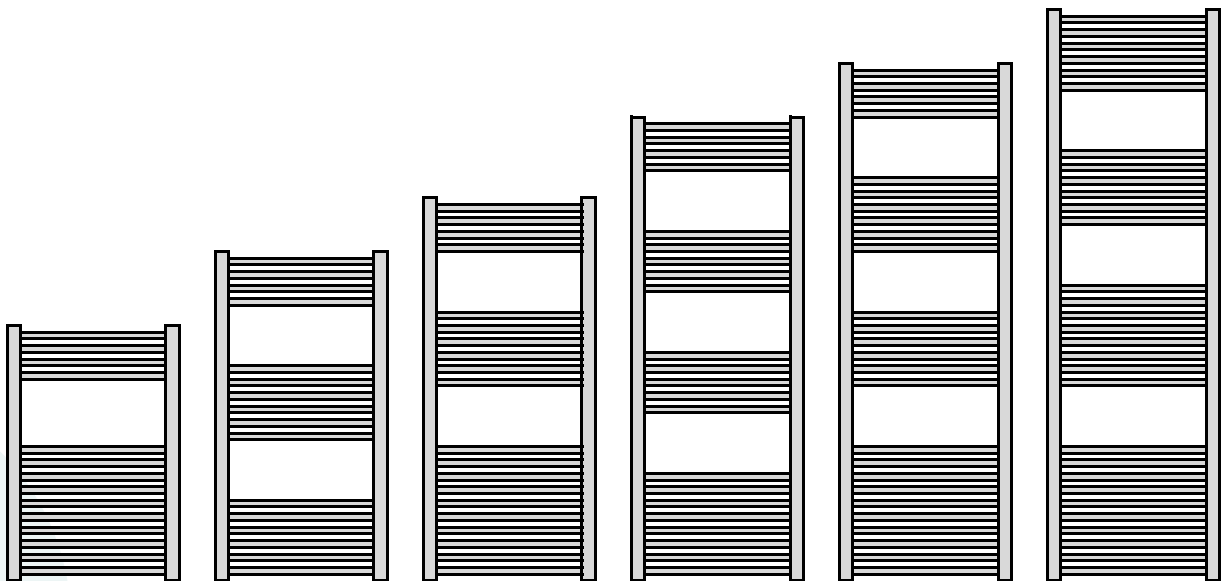

H : 800 mm

H : 1000 mm

H : 1200 mm

H : 1400 mm

H : 1600 mm

H : 1800 mm




Riva

Technical Data


Size (mm x mm)	Bar Diameter (mm)	Pipe Quantity (pcs)	Tapping Center (mm)		Heat Output Capacity (Delta 50 Watts)		Water Content (Lt)	Material	Package Size (cm x cm x cm)	Package Volume (dm³)	Pallet Size (cm x cm)	Quantity on Pallet (pcs)
			EU	UK	Chrome	Painted						
300 x 800	22	14 (4+10)	250	255	159	240	2,8	Steel	(31x83x4)	10,29	97 x 87	150
300 x 1000	22	16 (4+6+6)	250	255	184	271	3,4	Steel	(31x103x4)	12,77	97 x 107	150
300 x 1200	22	20 (4+6+10)	250	255	225	331	4,2	Steel	(31x123x4)	15,25	97 x 127	150
300 x 1400	22	22 (4+5+5+8)	250	255	255	372	4,7	Steel	(31x143x4)	17,73	97 x 147	150
300 x 1600	22	26 (4+6+6+10)	250	255	296	432	5,5	Steel	(31x163x4)	20,21	97 x 167	150
300 x 1800	22	30 (6+6+8+10)	250	255	336	491	6,3	Steel	(31x183x4)	22,69	97 x 187	150
400 x 800	22	14 (4 + 10)	350	355	196	296	3,3	Steel	(41x83x4)	13,61	86 x 87	100
400 x 1000	22	16 (4+6+6)	350	355	226	332	3,9	Steel	(41x103x4)	16,89	86 x 107	100
400 x 1200	22	20 (4+6+10)	350	355	277	407	4,8	Steel	(41x123x4)	20,17	86 x 127	100
400 x 1400	22	22 (4+5+5+8)	350	355	312	455	5,5	Steel	(41x143x4)	23,45	86 x 147	100
400 x 1600	22	26 (4+6+6+10)	350	355	363	530	6,3	Steel	(41x163x4)	26,73	86 x 167	100
400 x 1800	22	30 (6+6+8+10)	350	355	414	605	7,2	Steel	(41x183x4)	30,01	86 x 187	100
500 x 800	22	14 (4 + 10)	450	455	233	353	3,8	Steel	(51x83x4)	16,93	106 x 87	100
500 x 1000	22	16 (4+6+6)	450	455	268	393	4,5	Steel	(51x103x4)	21,01	106 x 107	100
500 x 1200	22	20 (4+6+10)	450	455	330	483	5,5	Steel	(51x123x4)	25,09	106 x 127	100
500 x 1400	22	22 (4+5+5+8)	450	455	369	539	6,2	Steel	(51x143x4)	29,17	106 x 147	100
500 x 1600	22	26 (4+6+6+10)	450	455	431	629	7,2	Steel	(51x163x4)	33,25	106 x 167	100
500 x 1800	22	30 (6+6+8+10)	450	455	492	719	8,2	Steel	(51x183x4)	37,33	106 x 187	100
600 x 800	22	14 (4+10)	550	555	271	409	4,2	Steel	(61x83x4)	20,25	126 x 87	100
600 x 1000	22	16 (4+6+6)	550	555	309	454	5,0	Steel	(61x103x4)	25,13	126 x 107	100
600 x 1200	22	20 (4+6+10)	550	555	382	560	6,1	Steel	(61x123x4)	30,01	126 x 127	100
600 x 1400	22	22 (4+5+5+8)	550	555	426	622	6,9	Steel	(61x143x4)	34,89	126 x 147	100
600 x 1600	22	26 (4+6+6+10)	550	555	498	727	8,0	Steel	(61x163x4)	39,77	126 x 167	100
600 x 1800	22	30 (6+6+8+10)	550	555	570	833	9,2	Steel	(61x183x4)	44,65	126 x 187	100
750 x 800	22	14 (4+10)	700	705	327	494	4,9	Steel	(76x83x4)	25,23	80 x 87	50
750 x 1000	22	16 (4+6+6)	700	705	372	546	5,8	Steel	(76x103x4)	31,31	80 x 107	50
750 x 1200	22	20 (4+6+10)	700	705	460	674	7,1	Steel	(76x123x4)	37,39	80 x 127	50
750 x 1400	22	22 (4+5+5+8)	700	705	512	747	8,0	Steel	(76x143x4)	43,47	80 x 147	50
750 x 1600	22	26 (4+6+6+10)	700	705	600	875	9,3	Steel	(76x163x4)	49,55	80 x 167	50
750 x 1800	22	30 (6+6+8+10)	700	705	687	1003	10,7	Steel	(76x183x4)	55,63	80 x 187	50

Towel Warmers

Available Forms

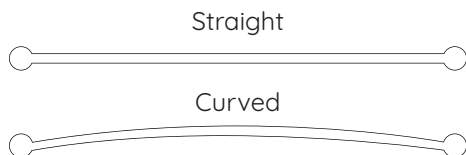

Available Colors

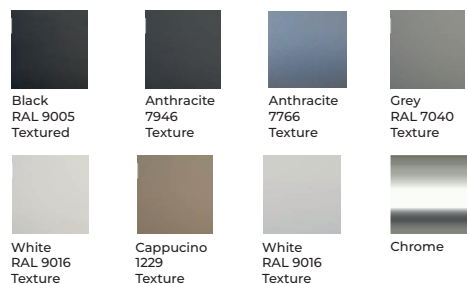



IZEM
EXPORT & IMPORT COMPANY

Radiators

Riva Electric

Standard

Thermostatic

Electric Towel Warmers



✉ info@izemexport.com

www.izemexport.com


Riva Electric

Standard and Thermostatic


Electric Towel Warmers

Product Type	Width (mm)	Height (mm)	Horizontal Bar Quantity	Tapping Center (mm)		Water Content (Lt)	Package Size (cm x cm x cm)	Package Volume (dm ³)	Resistance Watt Information		Center From Wall (mm)	Depth (mm)	Pallet Size (cm x cm)	Quantity on Pallet (pcs)
				EU	UK				Painted	Chrome				
Electric Radiator (Standard and Thermostatic)	300	800	14 (4+10)	250	255	2,8	37 x 92 x 11	37,44	300	150	64	79	115 x 96	60
	300	1000	16(4+6+6)	250	255	3,4	37 x 112 x 11	45,58	300	200	64	79	115 x 116	60
	300	1200	20(4+6+10)	250	255	4,2	37 x 132 x 11	53,72	400	300	64	79	115 x 136	60
	300	1400	22(4+5+5+8)	250	255	4,7	37 x 152 x 11	61,86	400	300	64	79	115 x 156	60
	300	1600	26(4+6+6+10)	250	255	5,5	37 x 172 x 11	70,00	500	300	64	79	115 x 176	60
	300	1800	30(6+6+8+10)	250	255	6,3	37 x 192 x 11	78,14	500	400	64	79	115 x 196	60
	400	800	14(4+10)	350	355	3,3	47 x 92 x 11	47,56	300	250	64	79	98 x 96	40
	400	1000	16(4+6+6)	350	355	3,9	47 x 112 x 11	57,90	400	250	64	79	98 x 116	40
	400	1200	20(4+6+10)	350	355	4,8	47 x 132 x 11	68,24	500	300	64	79	98 x 136	40
	400	1400	22(4+5+5+8)	350	355	5,5	47 x 152 x 11	78,58	600	400	64	79	98 x 156	40
	400	1600	26(4+6+6+10)	350	355	6,3	47 x 172 x 11	88,92	700	400	64	79	98 x 176	40
	400	1800	30(6+6+8+10)	350	355	7,2	47 x 192 x 11	99,26	800	500	64	79	98 x 196	40
	500	800	14(4+10)	450	455	3,8	57 x 92 x 11	57,68	400	250	64	79	118 x 96	40
	500	1000	16(4+6+6)	450	455	4,5	57 x 112 x 11	70,22	500	300	64	79	118 x 116	40
	500	1200	20(4+6+10)	450	455	5,5	57 x 132 x 11	82,76	600	400	64	79	118 x 136	40
	500	1400	22(4+5+5+8)	450	455	6,2	57 x 152 x 11	95,30	700	400	64	79	118 x 156	40
	500	1600	26(4+6+6+10)	450	455	7,2	57 x 172 x 11	107,84	700	500	64	79	118 x 176	40
	500	1800	30(6+6+8+10)	450	455	8,2	57 x 192 x 11	120,38	800	600	64	79	118 x 196	40
	600	800	14(4+10)	550	555	4,2	67 x 92 x 11	67,80	500	300	64	79	138 x 96	40
	600	1000	16(4+6+6)	550	555	5,0	67 x 112 x 11	82,54	600	400	64	79	138 x 116	40
	600	1200	20(4+6+10)	550	555	6,1	67 x 132 x 11	97,28	700	400	64	79	138 x 136	40
	600	1400	22(4+5+5+8)	550	555	6,9	67 x 152 x 11	112,02	800	500	64	79	138 x 156	40
	600	1600	26(4+6+6+10)	550	555	8,0	67 x 172 x 11	126,76	800	600	64	79	138 x 176	40
	600	1800	30(6+6+8+10)	550	555	9,2	67 x 192 x 11	141,50	900	700	64	79	138 x 196	40
	750	800	14(4+10)	700	705	4,9	82 x 92 x 11	82,98	500	400	64	79	86 x 96	20
	750	1000	16(4+6+6)	700	705	5,8	82 x 112 x 11	101,02	600	400	64	79	86 x 116	20
	750	1200	20(4+6+10)	700	705	7,1	82 x 132 x 11	119,06	700	500	64	79	86 x 136	20
	750	1400	22(4+5+5+8)	700	705	8,0	82 x 152 x 11	137,10	800	600	64	79	86 x 156	20
	750	1600	26(4+6+6+10)	700	705	9,3	82 x 172 x 11	155,14	900	600	64	79	86 x 176	20
	750	1800	30(6+6+8+10)	700	705	10,7	82 x 192 x 11	173,18	1000	700	64	79	86 x 196	20

Available Forms

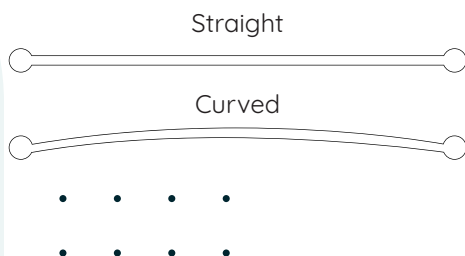


Available Colors

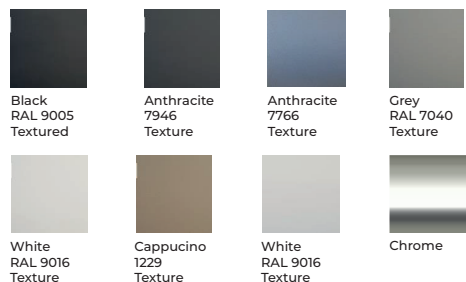

Electronic Control Units

Digital

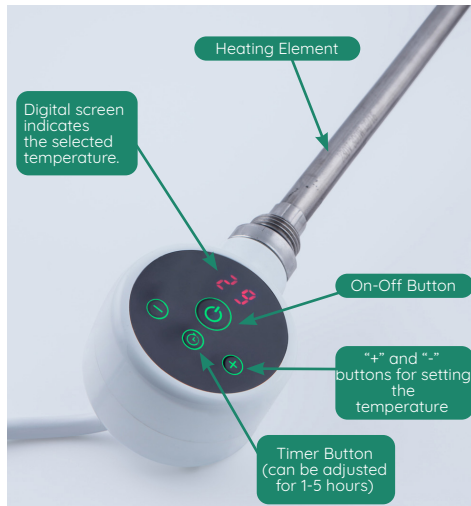

SUN DIGITAL

SUN DIGITAL is an electronic thermostat for the automatic control of electric towel radiators.

By means of an internal sensor it is capable of keeping the temperature of the towel radiator to a desired value.

Overview

- Room temperature control
- Heating On/Off
- Desired temperature setting
- Different electric resistances are available in a range between 150W and 1000W.

Functional Specifications	
Heating on/off	
Desired Temperature	Adjustable from +7°C to +35°C with visible comfort range
Safety	<ul style="list-style-type: none"> - Internal protection against overheating faults by term of use - Settings are saved in the event of a power supply outage - Built-in temperature sensor protects the device from overheating, limiting the temperature of the radiator to maximum of 70°C.

Dimensions and Finish Specifications			
Diameter of the unit	64 mm		
Width	12 mm		
Colour	White RAL 9016	Black RAL 9005	Chrome


Power Supply	
Operating Voltage	230V 50 Hz.
Maximum power	1000W, resistive load

Environment	
Protection Rating	IP44
Class	Class I
Operating temperature	+0°C to +50°C
Desired temperature setting	Adjustable from +7°C to +35°C
Storage temperature	-10°C to +70°C

Applicable Standards	
SAFETY EMC	EN 61000-4-2 :2009 EN 61000-4-3 :2006 + A1 + A2 EN 61000-4-4 :2012 EN 61000-4-5 : 2014 EN 61000-4-6 : 2014 EN 61000-4-11 2004 EN 61000-4-13 : 2002 + A1 + A2
LVD	EN 60335-1
RoHS	EN 50581

Electronic Control Units

Up & Down

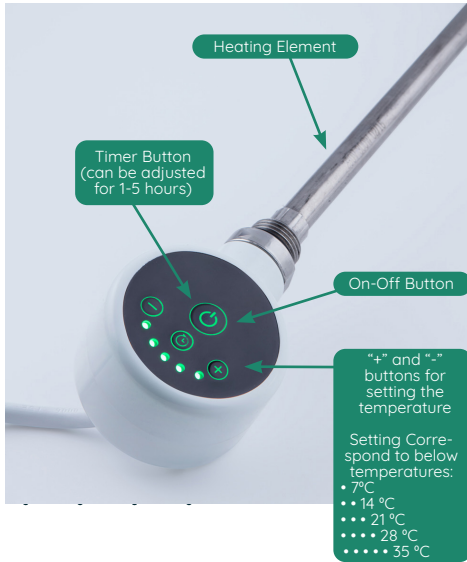

SUN UP & DOWN

SUN UP & DOWN is an electronic thermostat for the automatic control of electric towel radiators. By means of an internal sensor it is capable of keeping the temperature of the towel radiator to a desired value.

Overview

- Room temperature control
- Heating On/Off
- Desired temperature setting
- Different electric resistances are available in a range between 150W and 1000W.

Functional Specifications	
Heating on/off	
Desired temperature	Adjustable from +7°C to +35°C with visible comfort range
Safety	- Internal protection against over heating faults by term of use - Built-in temperature sensor protects the device from over-heating, limiting the temperature of the radiator to maximum of 70°C.

Dimensions and Finish Specifications			
Diameter of the unit	64 mm		
Width	12 mm		
Colour	White RAL 9016	Black RAL 9005	Chrome


Power Supply	
Operating Voltage	230V 50 Hz.
Maximum power	1000W, resistive load

Environment	
Protection Rating	IP44
Class	Class I
Operating Temperature	+0°C to +50°C
Desired Temperature Settings	Adjustable from +7°C to +35°C
Storage Temperature	-10°C to +70°C

Applicable Standards	
SAFETY EMC	EN 61000-4-2 :2009 EN 61000-4-3 :2006 + A1 + A2 EN 61000-4-4 :2012 EN 61000-4-5 : 2014 EN 61000-4-6 : 2014 EN 61000-4-11 2004 EN 61000-4-13 : 2002 + A1 + A2
LVD	EN 60335-1
RoHS	EN 50581

Electronic Control Units

On & Off

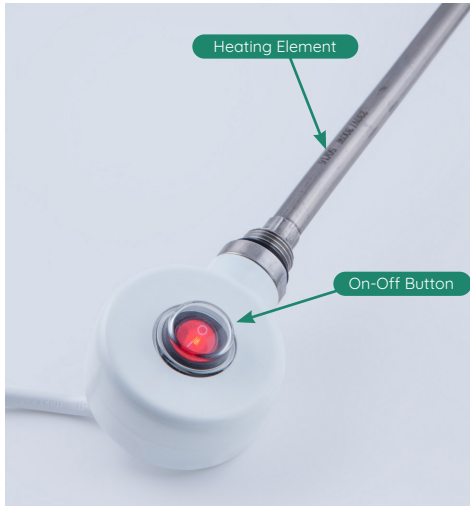

SUN ON & OFF

SUN ON&OFF is an electronic thermostat for the automatic control of electric towel radiators.

Overview

- Room temperature control
- Heating On/Off
- Different electric resistances are available in a range between 150W and 1000W.

Functional Specifications	
Heating on/off	
Safety	-Internal protection against over heating faults by term of use -Built-in temperature sensor protects the device from over-heating, limiting the temperature of the radiator to maximum of 70°C.

Dimensions and Finish Specifications			
Diameter of the unit	64 mm		
Width	12 mm		
Colour	White RAL 9016	Black RAL 9005	Chrome


Power Supply	
Operating Voltage	230V 50 Hz.
Maximum power	1000W, resistive load

Environment	
Protection Rating	IP44
Class	Class I
Operating temperature	+0°C to +50°C
Storage temperature	-10°C to +70°C

Applicable Standards	
SAFETY EMC	EN 61000-4-2 :2009 EN 61000-4-3 :2006 + A1 + A2 EN 61000-4-4 :2012 EN 61000-4-5 : 2014 EN 61000-4-6 : 2014 EN 61000-4-11 2004 EN 61000-4-13 : 2002 + A1 + A2
LVD	EN 60335-1
RoHS	EN 50581

Electronic Control Units

One Touch

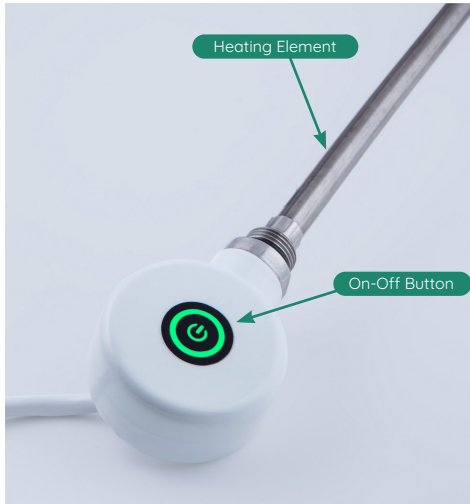

SUN ONE TOUCH

SUN ONE TOUCH is an electronic thermostat for the automatic control of electric towel radiators.

Overview

- Room temperature control
- Heating On/Off
- Different electric resistances are available in a range between 150W and 1000W.

Functional Specifications	
Heating on/off	
Safety	-Internal protection against over heating faults by term of use -Built-in temperature sensor protects the device from over-heating, limiting hetemperature of theradiator to maximum of 70°C.

Dimensions and Finish Specifications			
Diameter of the unit	64 mm		
Width	12 mm		
Colour	White RAL 9016	Black RAL 9005	Chrome

Power Supply	
Operating Voltage	230V 50 Hz.
Maximum power	1000W, resistive load

Environment	
Protection Rating	IP44
Class	Class I
Operating temperature	+0°C to +50°C
Storage temperature	-10°C to +70°C

Applicable Standards	
SAFETY EMC	EN 61000-4-2 :2009 EN 61000-4-3 :2006 + A1 + A2 EN 61000-4-4 :2012 EN 61000-4-5 : 2014 EN 61000-4-6 : 2014 EN 61000-4-11 2004 EN 61000-4-13 : 2002 + A1 + A2
LVD	EN 60335-1
RoHS	EN 50581



IZEM
EXPORT & IMPORT COMPANY

About Us



Our company, which started its operations in 2021, is Turkey's largest modern export company.

Izem Ltd specialises in supplying a varied range of high quality bathroom, home products into the retail, wholesale and construction industry all across the US & Europe & UK.

We have an innovative approach to developing our products that are competitive in the industry, as well as consistently ensuring we are up to date with the latest moving trends.

Professionalism, care and constant commitment to production processes, combined with close attention to the customer and the market, make our group an international company that is able to offer targeted and reliable solutions.

İzem Isı ve İnşaat Malzemeleri Dış Ticaret Ltd.Şti.

Management Office

75.Yıl Mahallesi
Bahri Sarıtepe Caddesi
No:51 -K:2 D:3
Yunussemre / Manisa /TURKEY

Head Office

Cumhuriyet Mah.5050 Sok.No:3/55
Yunussemre /Manisa /TURKEY

E-mail:

info@izemexport.com

www.izemexport.com

