

FORD ECOTORQ 13G55

550 kVA standby power
Non-regulated emission
For generator sets



Features

Low cost of ownership

Through world class fuel economy, long maintenance interval and use of widely available maintenance parts, Ecotorq engines care about your business.

High uptime

Single engine architecture and powerful diagnostics make this engine easier to fix and reduce downtime.

Reliable and durable

Based on a field proven design, this is an engine you can count on for your toughest jobs without compromising on performance.

Performance

Excellent single step 110% load carrying capability.

Specification

Cylinders	6 in-line
Displacement, liters (in ³)	12,7 (775)
Bore and stroke, mm (in)	130 x 160 (5,12 x 6,3)
Compression ratio	17 : 1
Combustion system	Direct injection
Liner type	Wet liner
Aspiration	Turbocharged aftercooled
Cooling	Liquid 50:50 water glycol mix
Flywheel dimensions	SAE 1 housing / SAE 14 in. flywheel
Rotation (viewed from flywheel)	Counter clockwise
Dry weight, kg (lb)	1.175 (2.590)
Lubrication oil capacity, liters (in ³)	46 (2.807)
CAN standard	SAE J1939

Standard

- Electronically controlled
- High pressure common rail
- Cast iron engine block
- Alloy steel crank with induction hardened and polished bearing surfaces
- Friction welded steel pistons
- Fixed geometry turbocharger
- Spin-on, 2x full flow fuel filter
- Spin-on, 2x full flow oil filter
- Spin-on coolant filter
- Integrated oil cooler
- Deep front oil sump
- Easy access oil dipstick
- Open crankcase ventilation
- Alternator 130 A
- Starter 6,5 kW
- Belt driven cooling fan interface
- SAE 10W/40 lubrication oil
- Synchronisation enabled

Optional

- Cooling pack with all necessary installation parts
- Air cleaner
- Fuel pre-filter with water separation and water-in-fuel sensor
- Grid heater for intake air
- Closed crank case ventilation



This leaflet provides information about the current technical specifications and the standard or optional equipment available as of the date it was issued. Specifications may be changed from time to time without prior notice. For this reason, please consult us to obtain updated and accurate information on the engines you wish to buy. The images used in this leaflet may be different from the engines on sale. The technical specifications provided herein are for standard engines. Selection of any optional equipment might cause differences from these specifications.

FORD ECOTORQ 13G55

550 kVA standby power
Non-regulated emission
For generator sets

Dimensions

All dimensions are in mm.

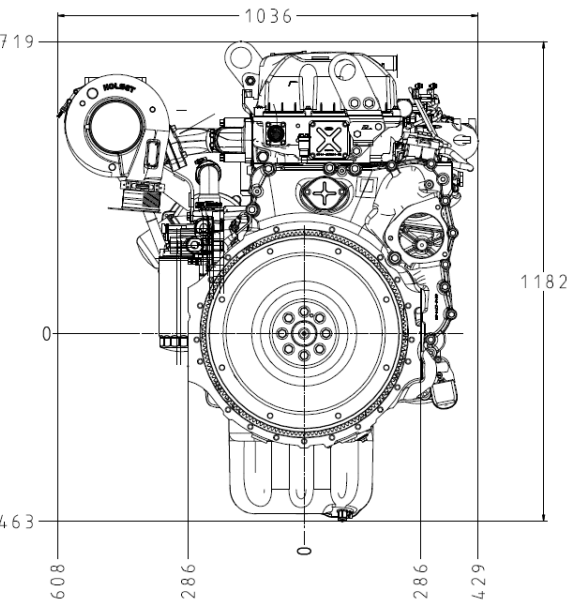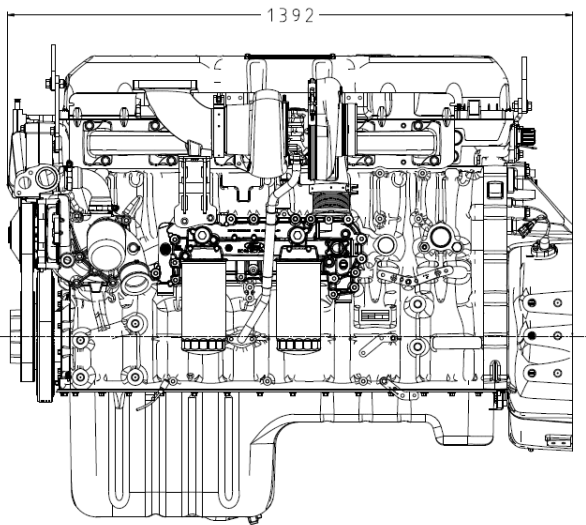

Performance

According to ISO 3046 and ISO 8528

1500 rpm - 50 HZ	Standby	Prime
Gross power, kW	485	441
Net power, kW	472	428
Typical generator output, kW (!)	439	398
Typical generator output, kVA (!)	550	498

1800 rpm - 60 HZ	Standby	Prime
Gross power, kW	490	448
Net power, kW	468	426
Typical generator output, kW (!)	435	396
Typical generator output, kVA (!)	544	495

Fuel Consumption, g/kWh (l/h)	1500 rpm	1800 rpm
Standby	191 (110)	191 (112)
Prime, 100% load	185 (97)	189 (101)
Prime, 75% load	184 (72)	188 (77)
Prime, 50% load	187 (49)	192 (55)

(!): Considering a generator efficiency of 93% and power factor of 0,8

For more information please contact ecotorq@ford.com.tr or visit our site www.fordotosan.com.tr/en

This leaflet provides information about the current technical specifications and the standard or optional equipment available as of the date it was issued. Specifications may be changed from time to time without prior notice. For this reason, please consult us to obtain updated and accurate information on the engines you wish to buy. The images used in this leaflet may be different from the engines on sale. The technical specifications provided herein are for standard engines. Selection of any optional equipment might cause differences from these specifications.