



COLD STORAGE **ISOLATED DOORS**


ESADPANEL
INDUSTRIAL COOLING SYSTEMS

COLD STORAGE

SLIDING DOOR

ALUMINIUM FRAME

Sliding doors can be produced from the smallest sizes up to 350x500. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

SPECS & OPTIONS	POSITIVE	NEGATIVE
LEAF THICKNESS	92 MM	116 MM
RESISTANCE	NO	INSIDE OF GASKETS
CORE MATERIAL	PUR 42 (±2) kg/m3	
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm	
COLOURS		
OPTIONAL	STEPS, BUMPERS, GLAZINGS	

Above specs can be change without noticing. Ask for more details to ESADPANEIL











COLD STORAGE

SLIDING DOOR

ALUMINIUM FRAME

Sliding doors can be produced from the smallest sizes up to 350x500. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

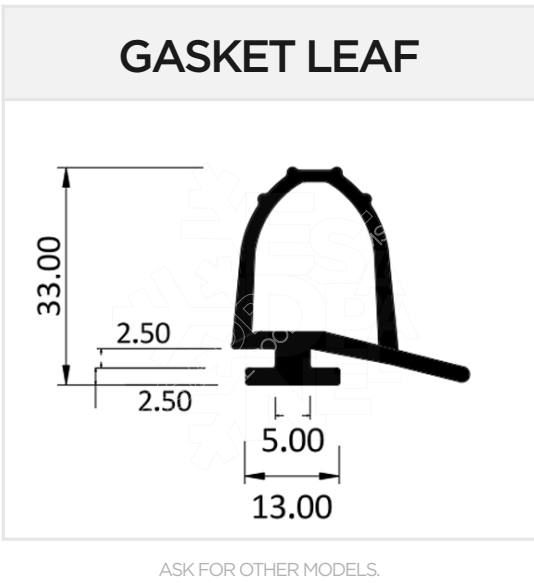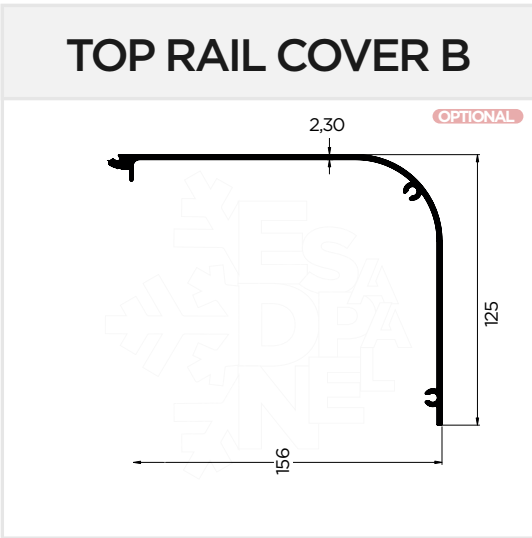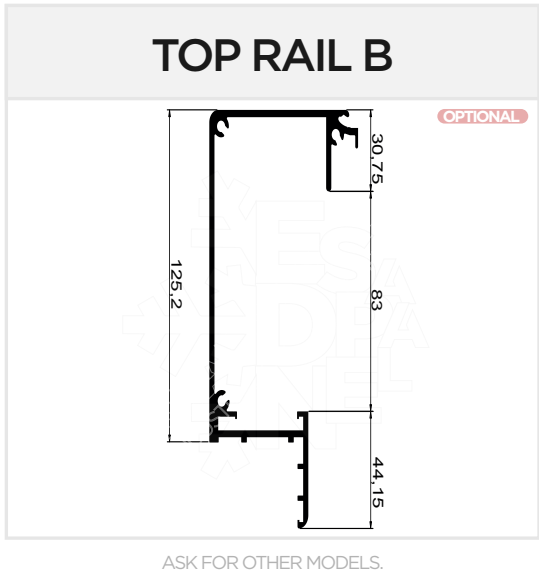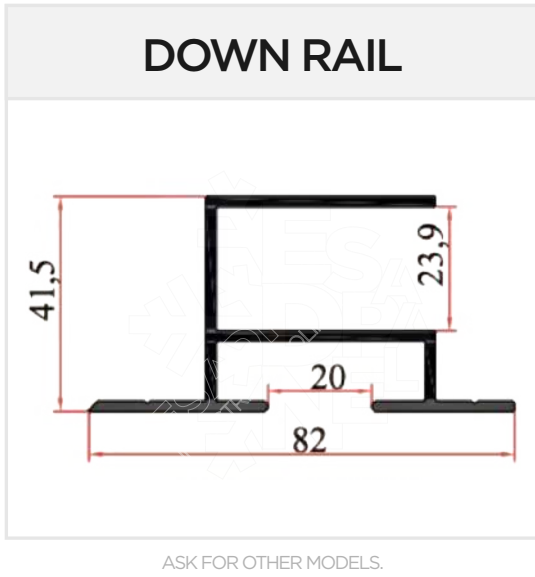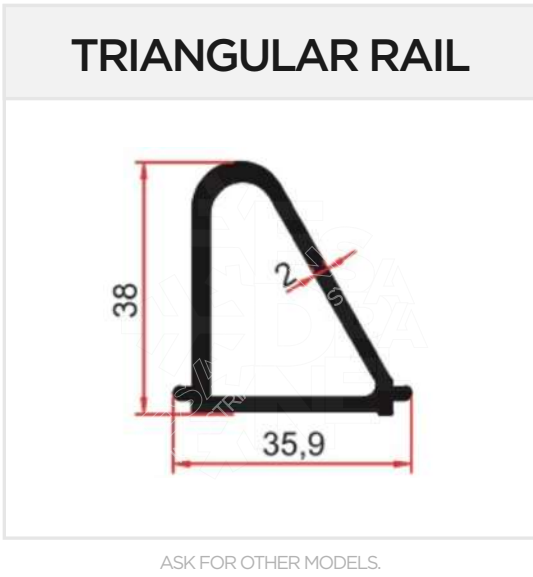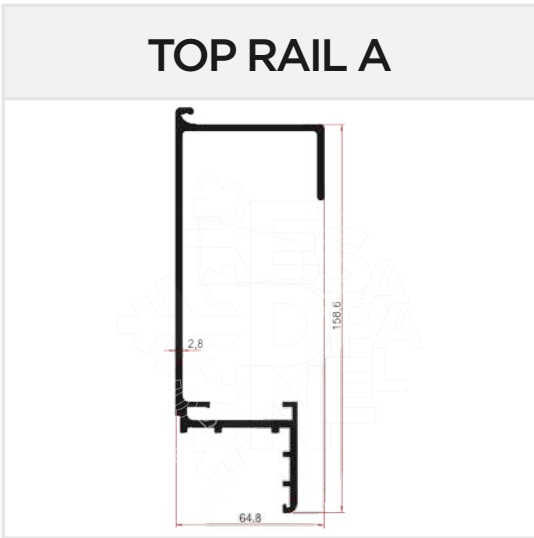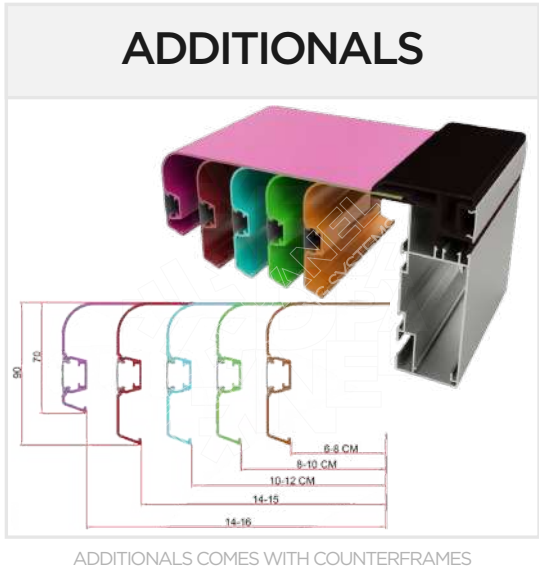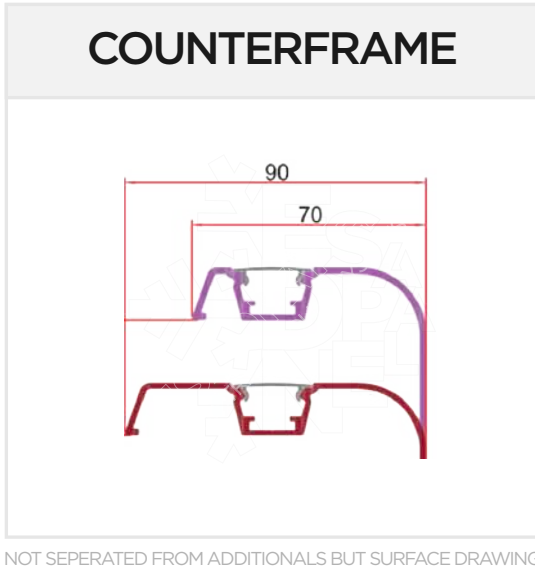


COLD STORAGE **SLIDING DOOR** ALUMINIUM FRAME

Sliding doors can be produced from the smallest sizes up to 350x400. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.



COLD STORAGE **SLIDING DOOR** ALUMINIUM FRAME

Sliding doors can be produced from the smallest sizes up to 350x400. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

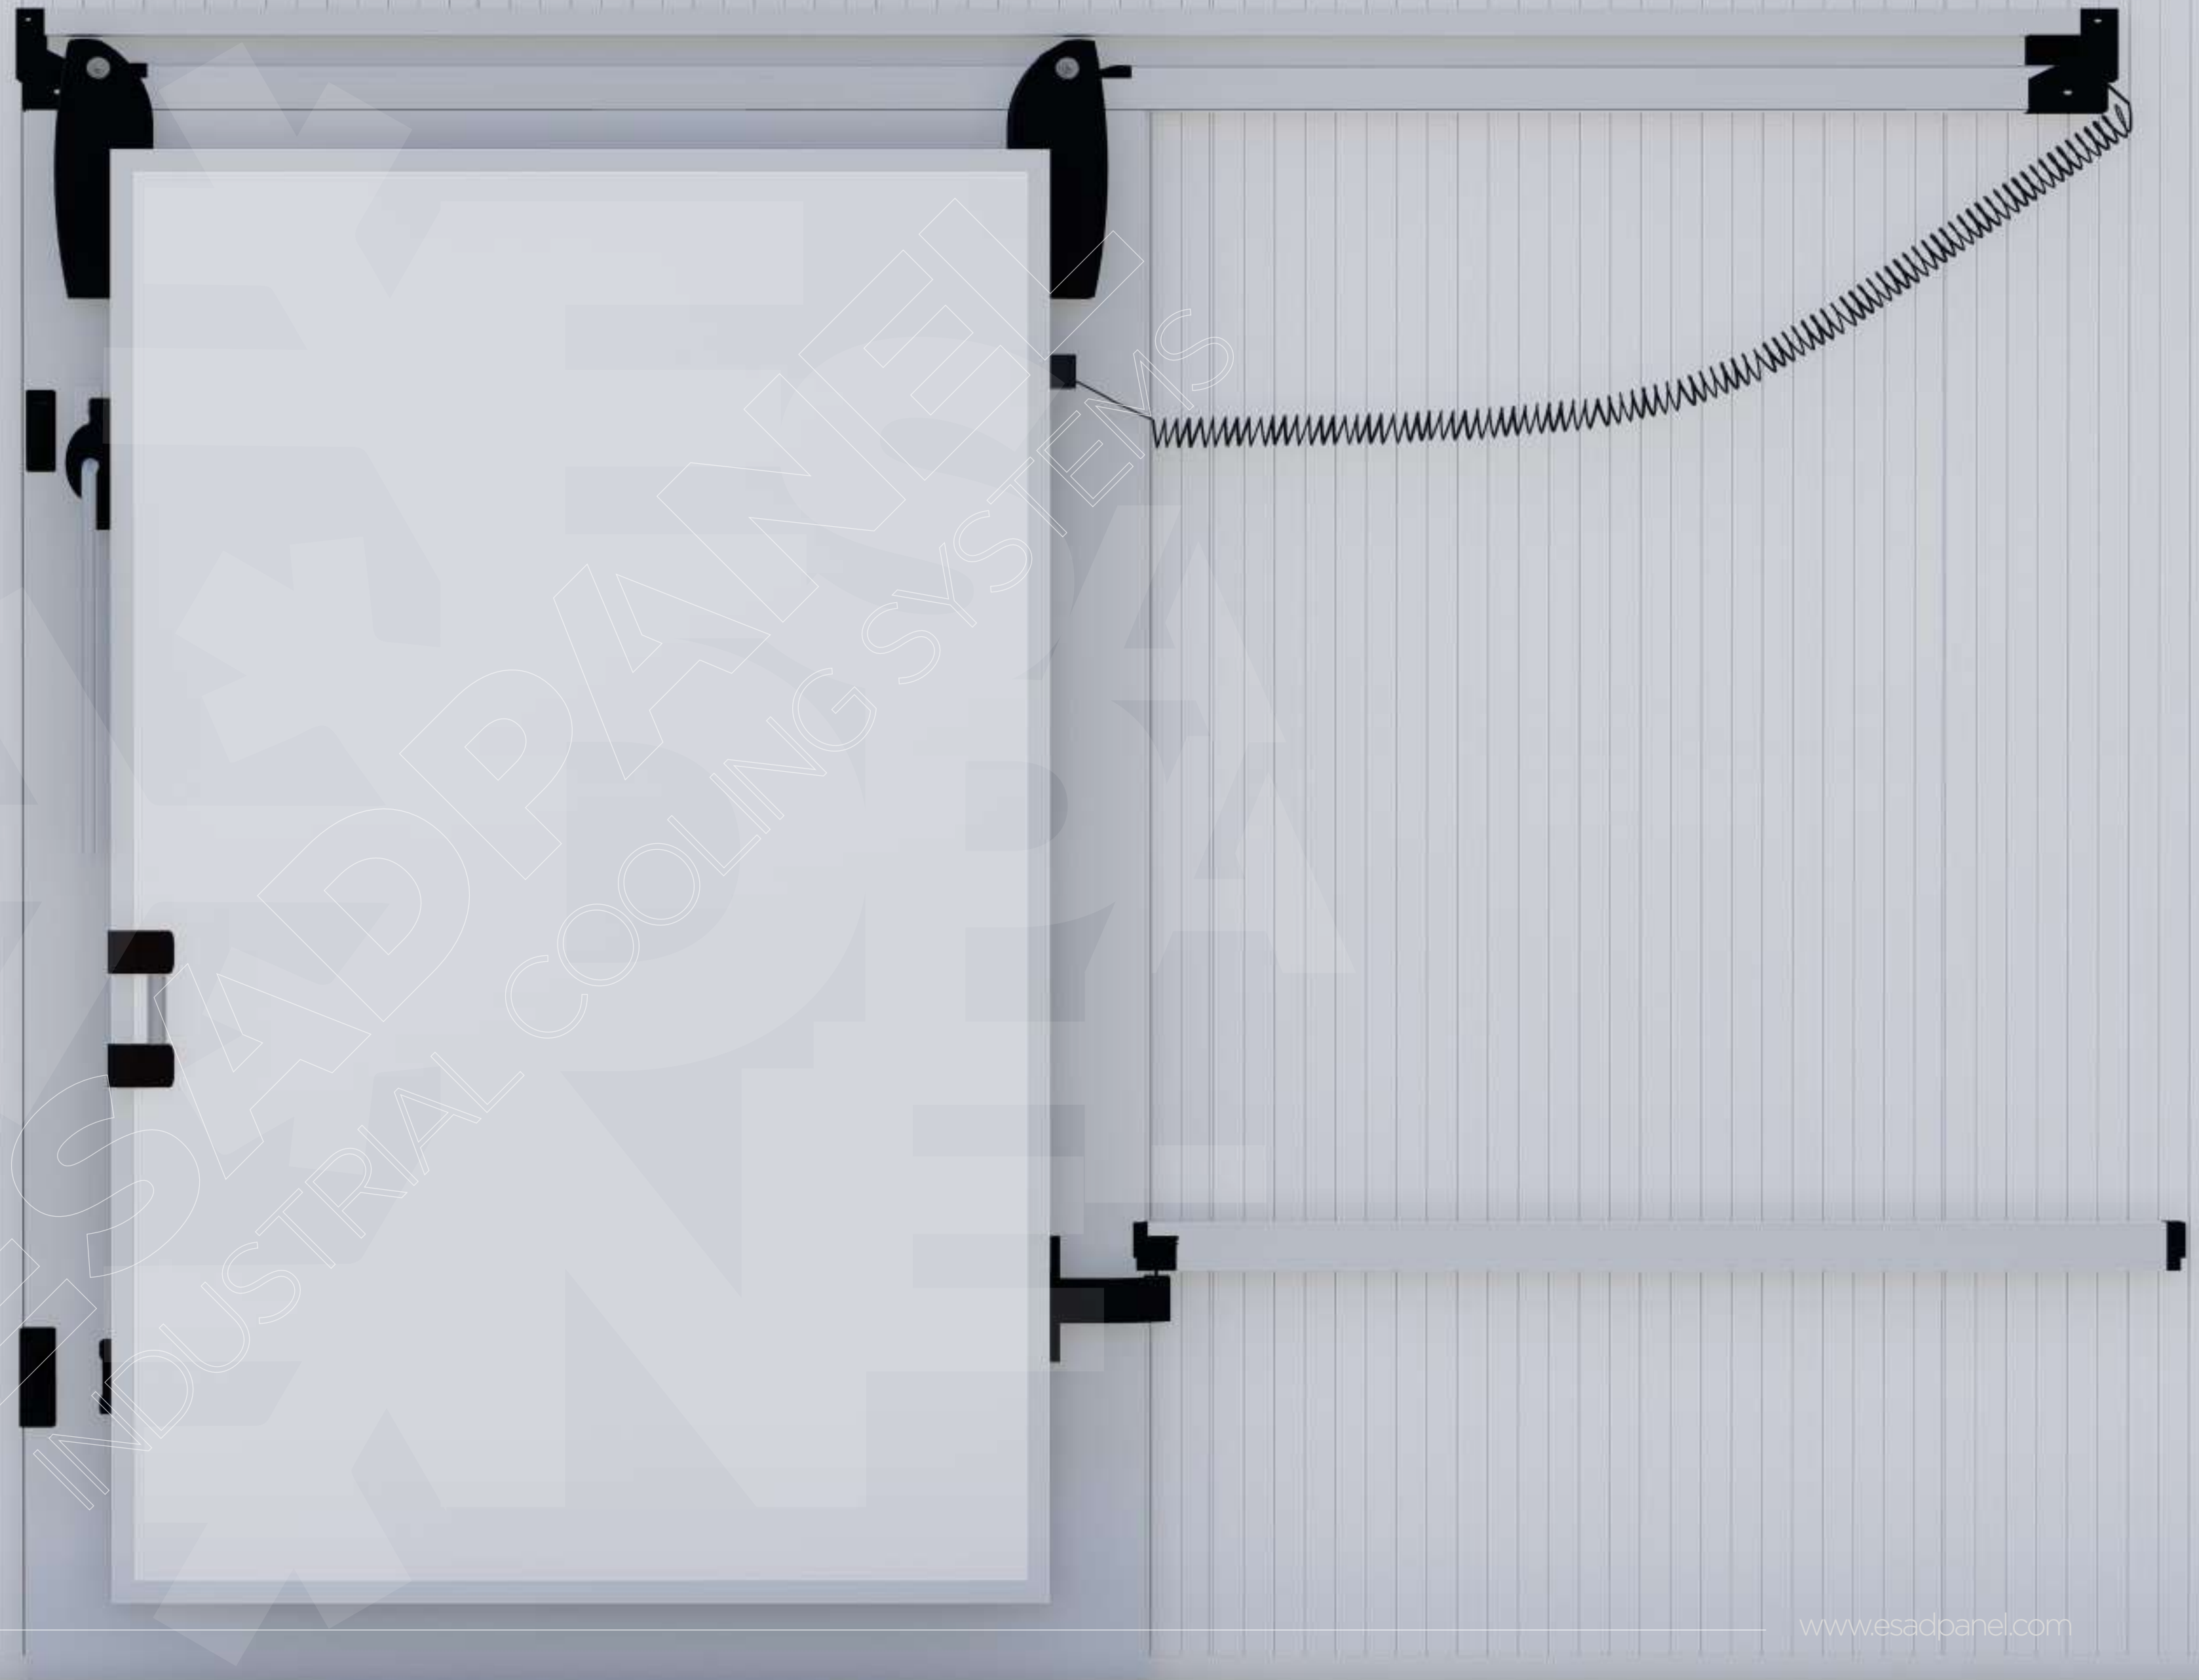

COLD STORAGE **SLIDING DOOR**

ALUMINIUM FRAME

Sliding doors can be produced from the smallest sizes up to 350x400. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.


COLD STORAGE

SLIDING DOOR

ALUMINIUM FRAME

Sliding doors can be produced from the smallest sizes up to 350x500. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	VIA STEPS WFL	+ STEPS WALL FRAME LENGTH
SK	SKIRTING HEIGHT	WBW	WALL BLANK WIDTH
SRL	SLIDING RAIL LENGTH	WBL	WALL BLANK LENGTH
SRH	SLIDING RAIL HEIGHT	VIA STEPS WBL	+ STEPS WALL BLANK LENGTH
STL	SLIDING TAIL LENGTH		

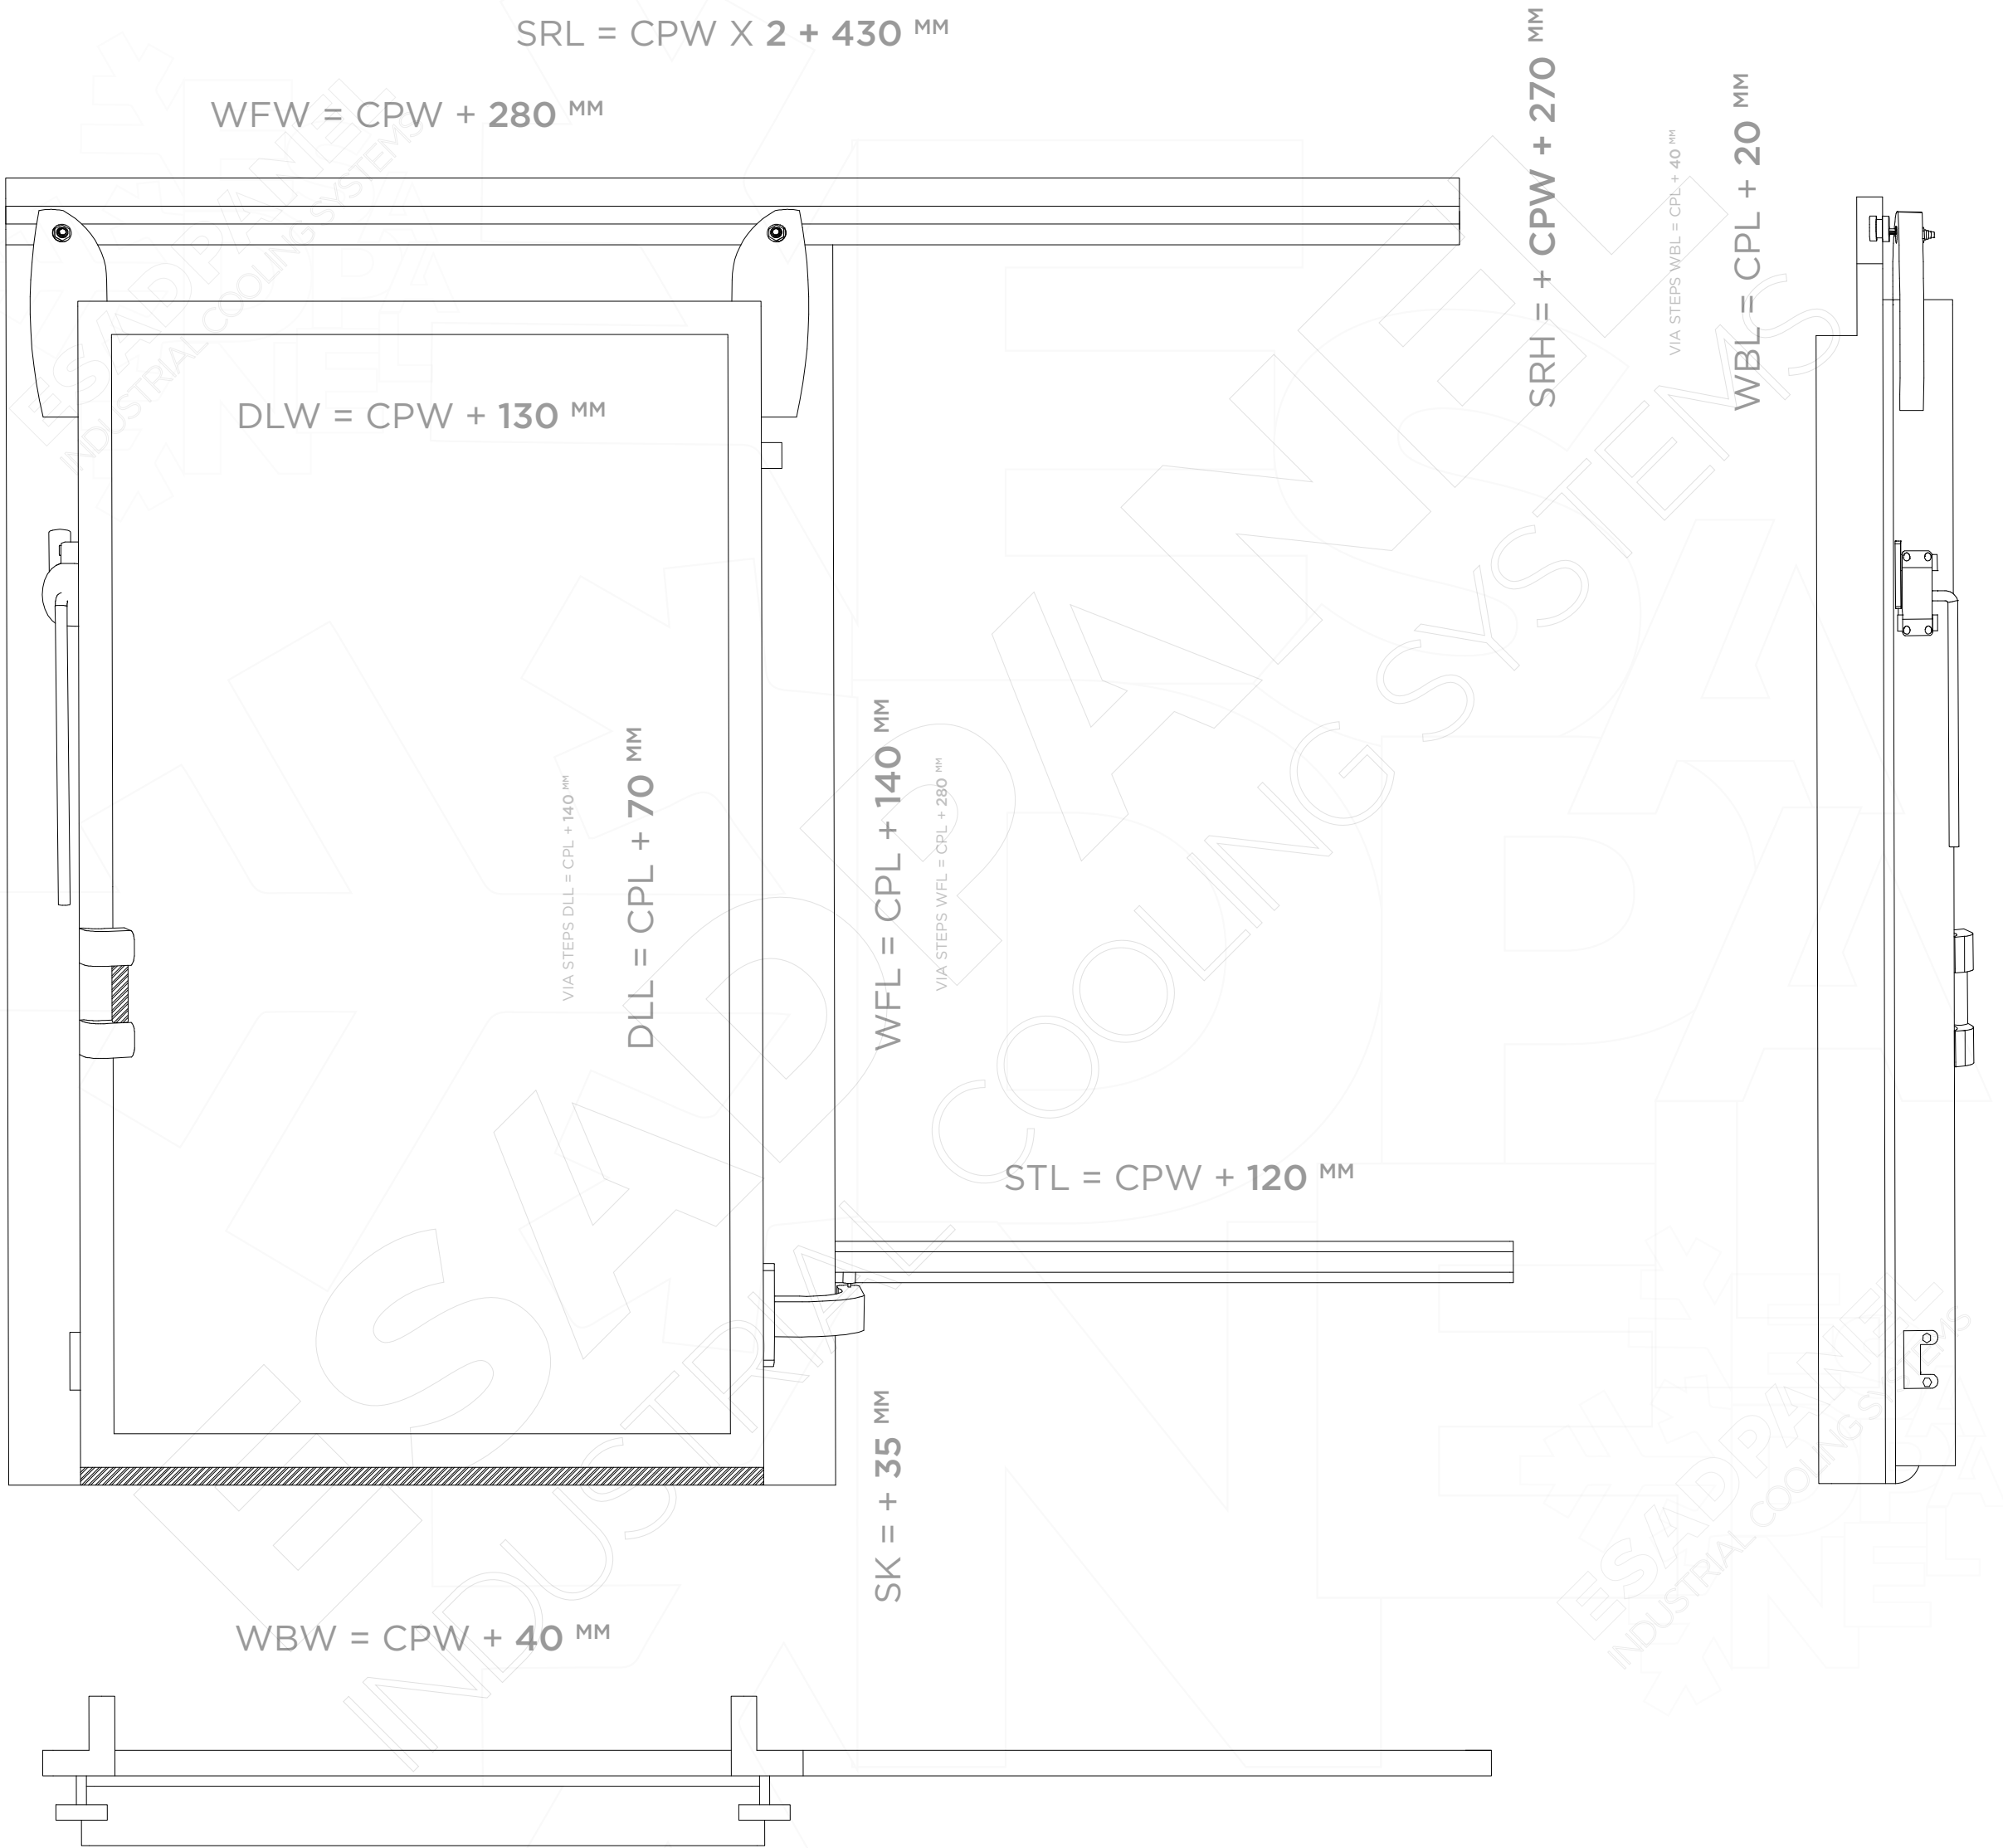


COLD STORAGE

HINGED DOOR

ALUMINIUM FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

SPECS & OPTIONS	POSITIVE	NEGATIVE
LEAF THICKNESS	68 MM	92 MM
RESISTANCE	NO	INSIDE OF GASKETS
CORE MATERIAL	PUR 42 (±2) kg/m3	
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm	
COLOURS		
OPTIONAL	STEPS, BUMPERS, GLAZINGS	

Above specs can be change without noticing. Ask for more details to ESADPANEIL



COLD STORAGE **HINGED DOOR** ALUMINIUM FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

COLD STORAGE **HINGED DOOR**

ALUMINIUM FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.


COLD STORAGE

HINGED DOOR

ALUMINIUM FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	VIA STEPS WFL	+ STEPS WALL FRAME LENGTH
SK	SKIRTING HEIGHT	WBW	WALL BLANK WIDTH
		WBL	WALL BLANK LENGTH
		VIA STEPS WBL	+ STEPS WALL BLANK LENGTH

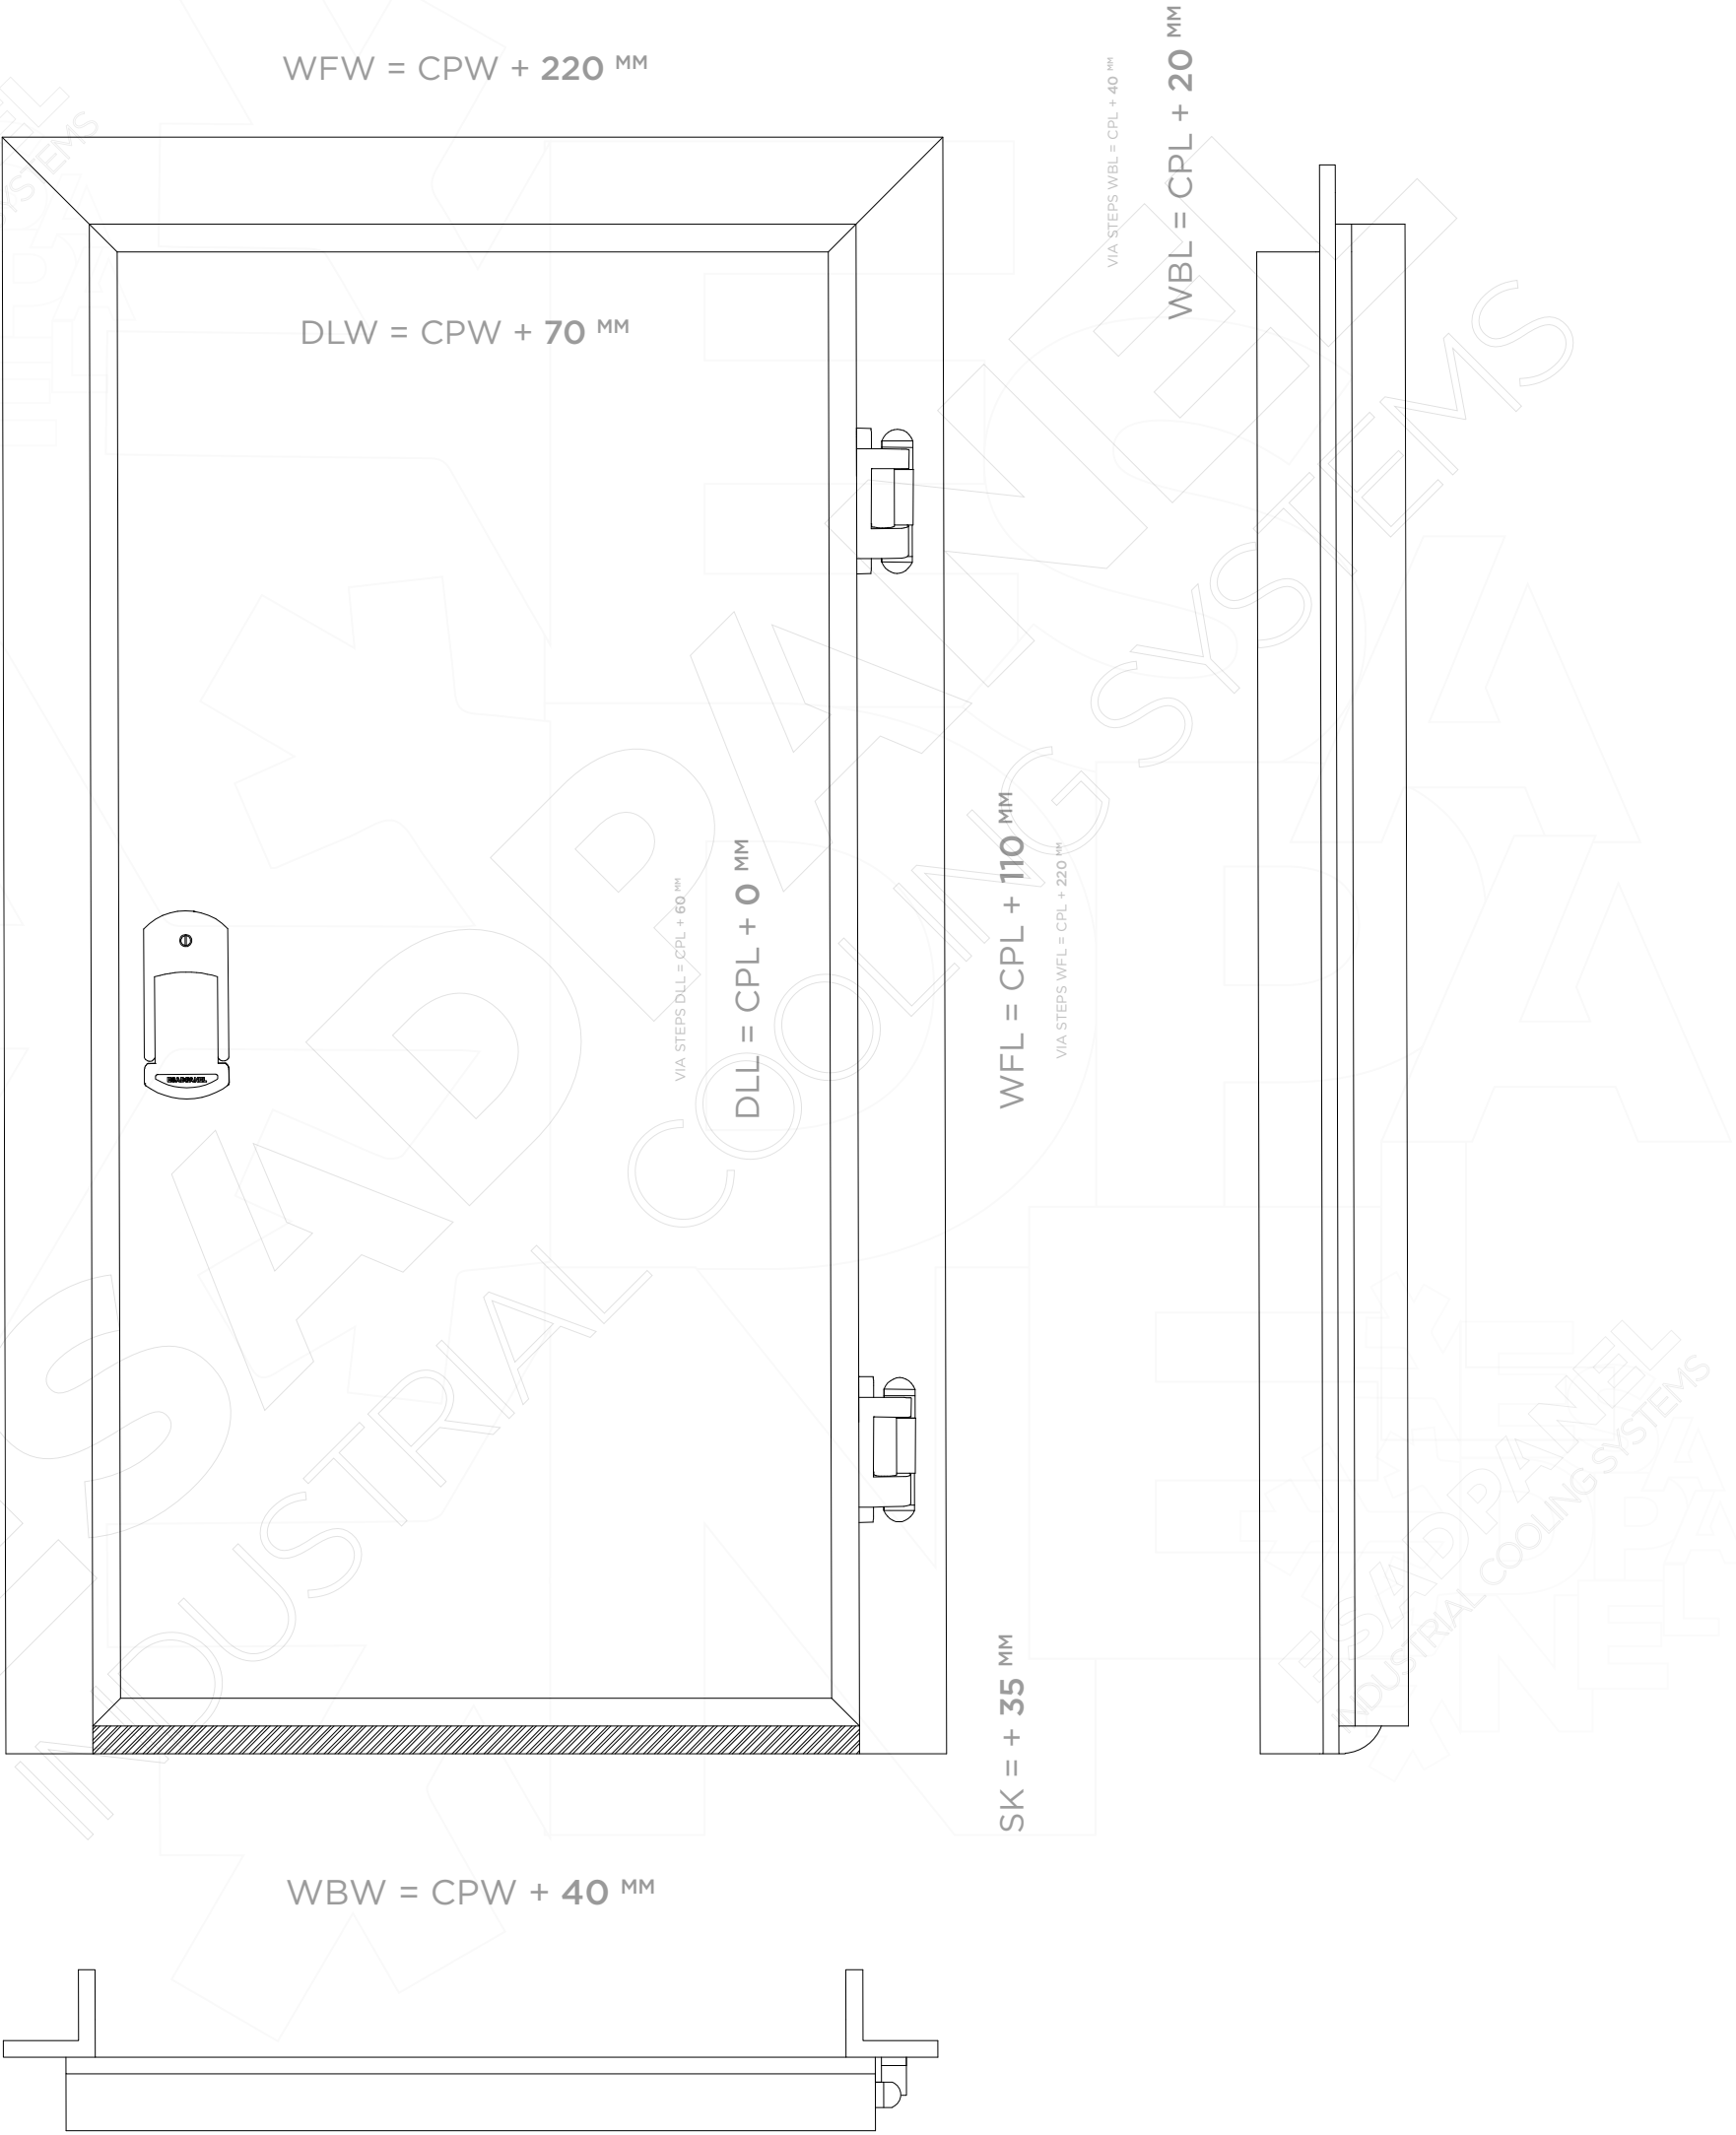


COLD STORAGE

SLIDING DOOR

PVC FRAME

Sliding doors can be produced from the smallest sizes up to 350x500. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

SPECS & OPTIONS	POSITIVE	NEGATIVE
LEAF THICKNESS	92 MM	116 MM
RESISTANCE	NO	INSIDE OF GASKETS
CORE MATERIAL	PUR 42 (±2) kg/m3	
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm	
COLOURS		
OPTIONAL	STEPS, BUMPERS, GLAZINGS	

Above specs can be change without noticing. Ask for more details to ESADPANEIL










COLD STORAGE

SLIDING DOOR

PVC FRAME

Sliding doors can be produced from the smallest sizes up to 350x500. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

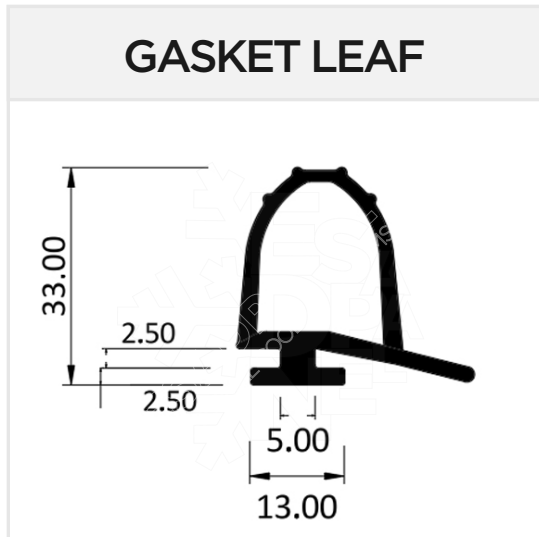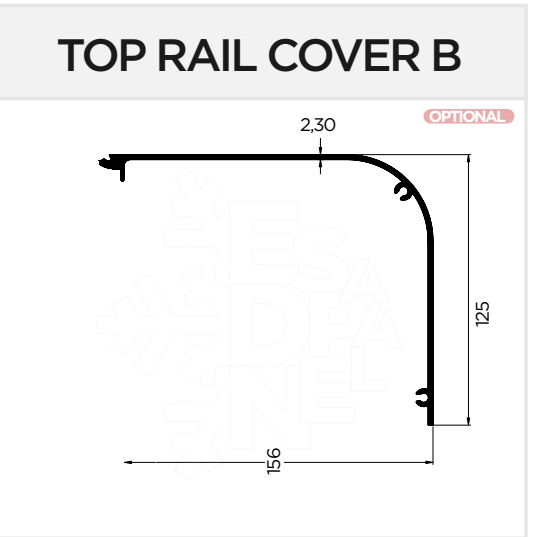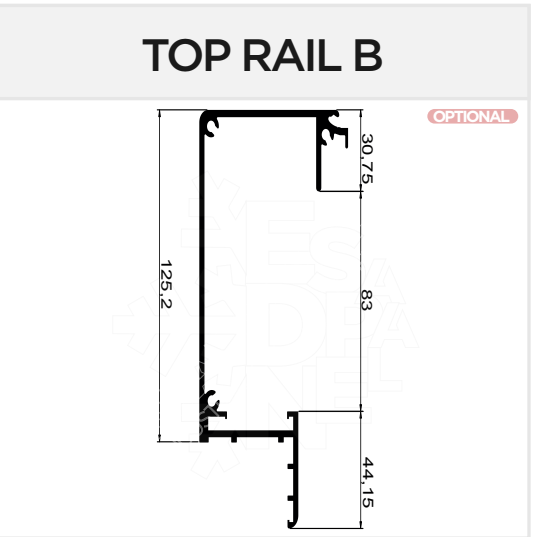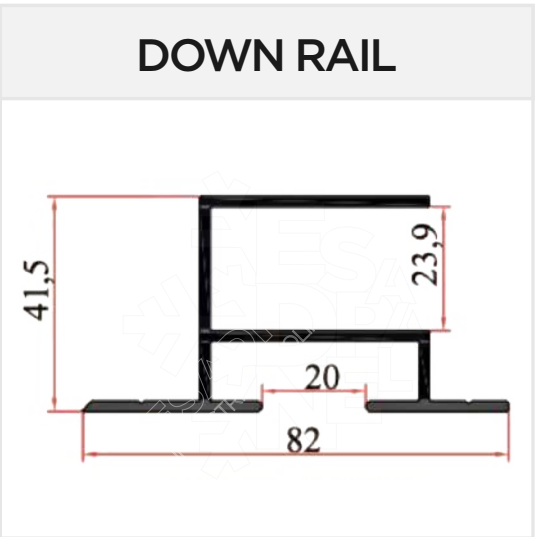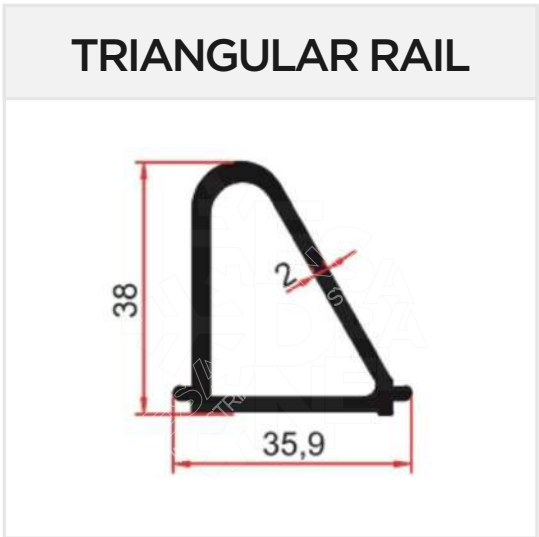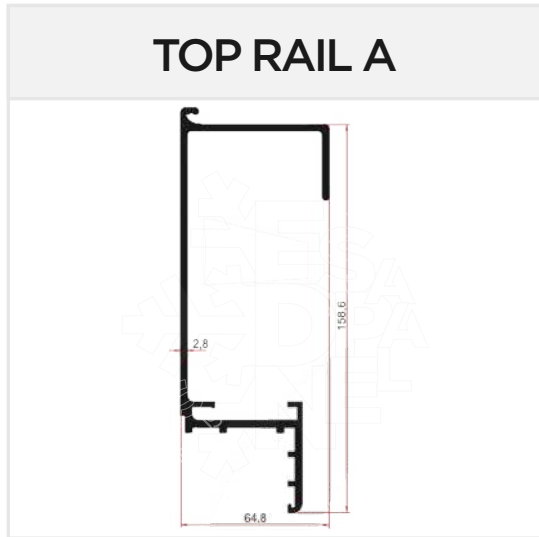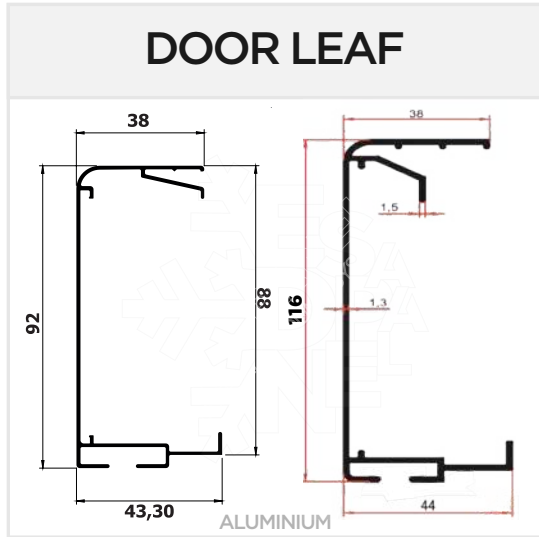

COLD STORAGE **SLIDING DOOR**

PVC FRAME

Sliding doors can be produced from the smallest sizes up to 350x400. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.




COLD STORAGE

SLIDING DOOR

PVC FRAME

Sliding doors can be produced from the smallest sizes up to 350x400. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	VIA STEPS WFL	+ STEPS WALL FRAME LENGTH
SK	SKIRTING HEIGHT	WBW	WALL BLANK WIDTH
SRL	SLIDING RAIL LENGTH	WBL	WALL BLANK LENGTH
SRH	SLIDING RAIL HEIGHT	VIA STEPS WBL	+ STEPS WALL BLANK LENGTH
STL	SLIDING TAIL LENGTH		

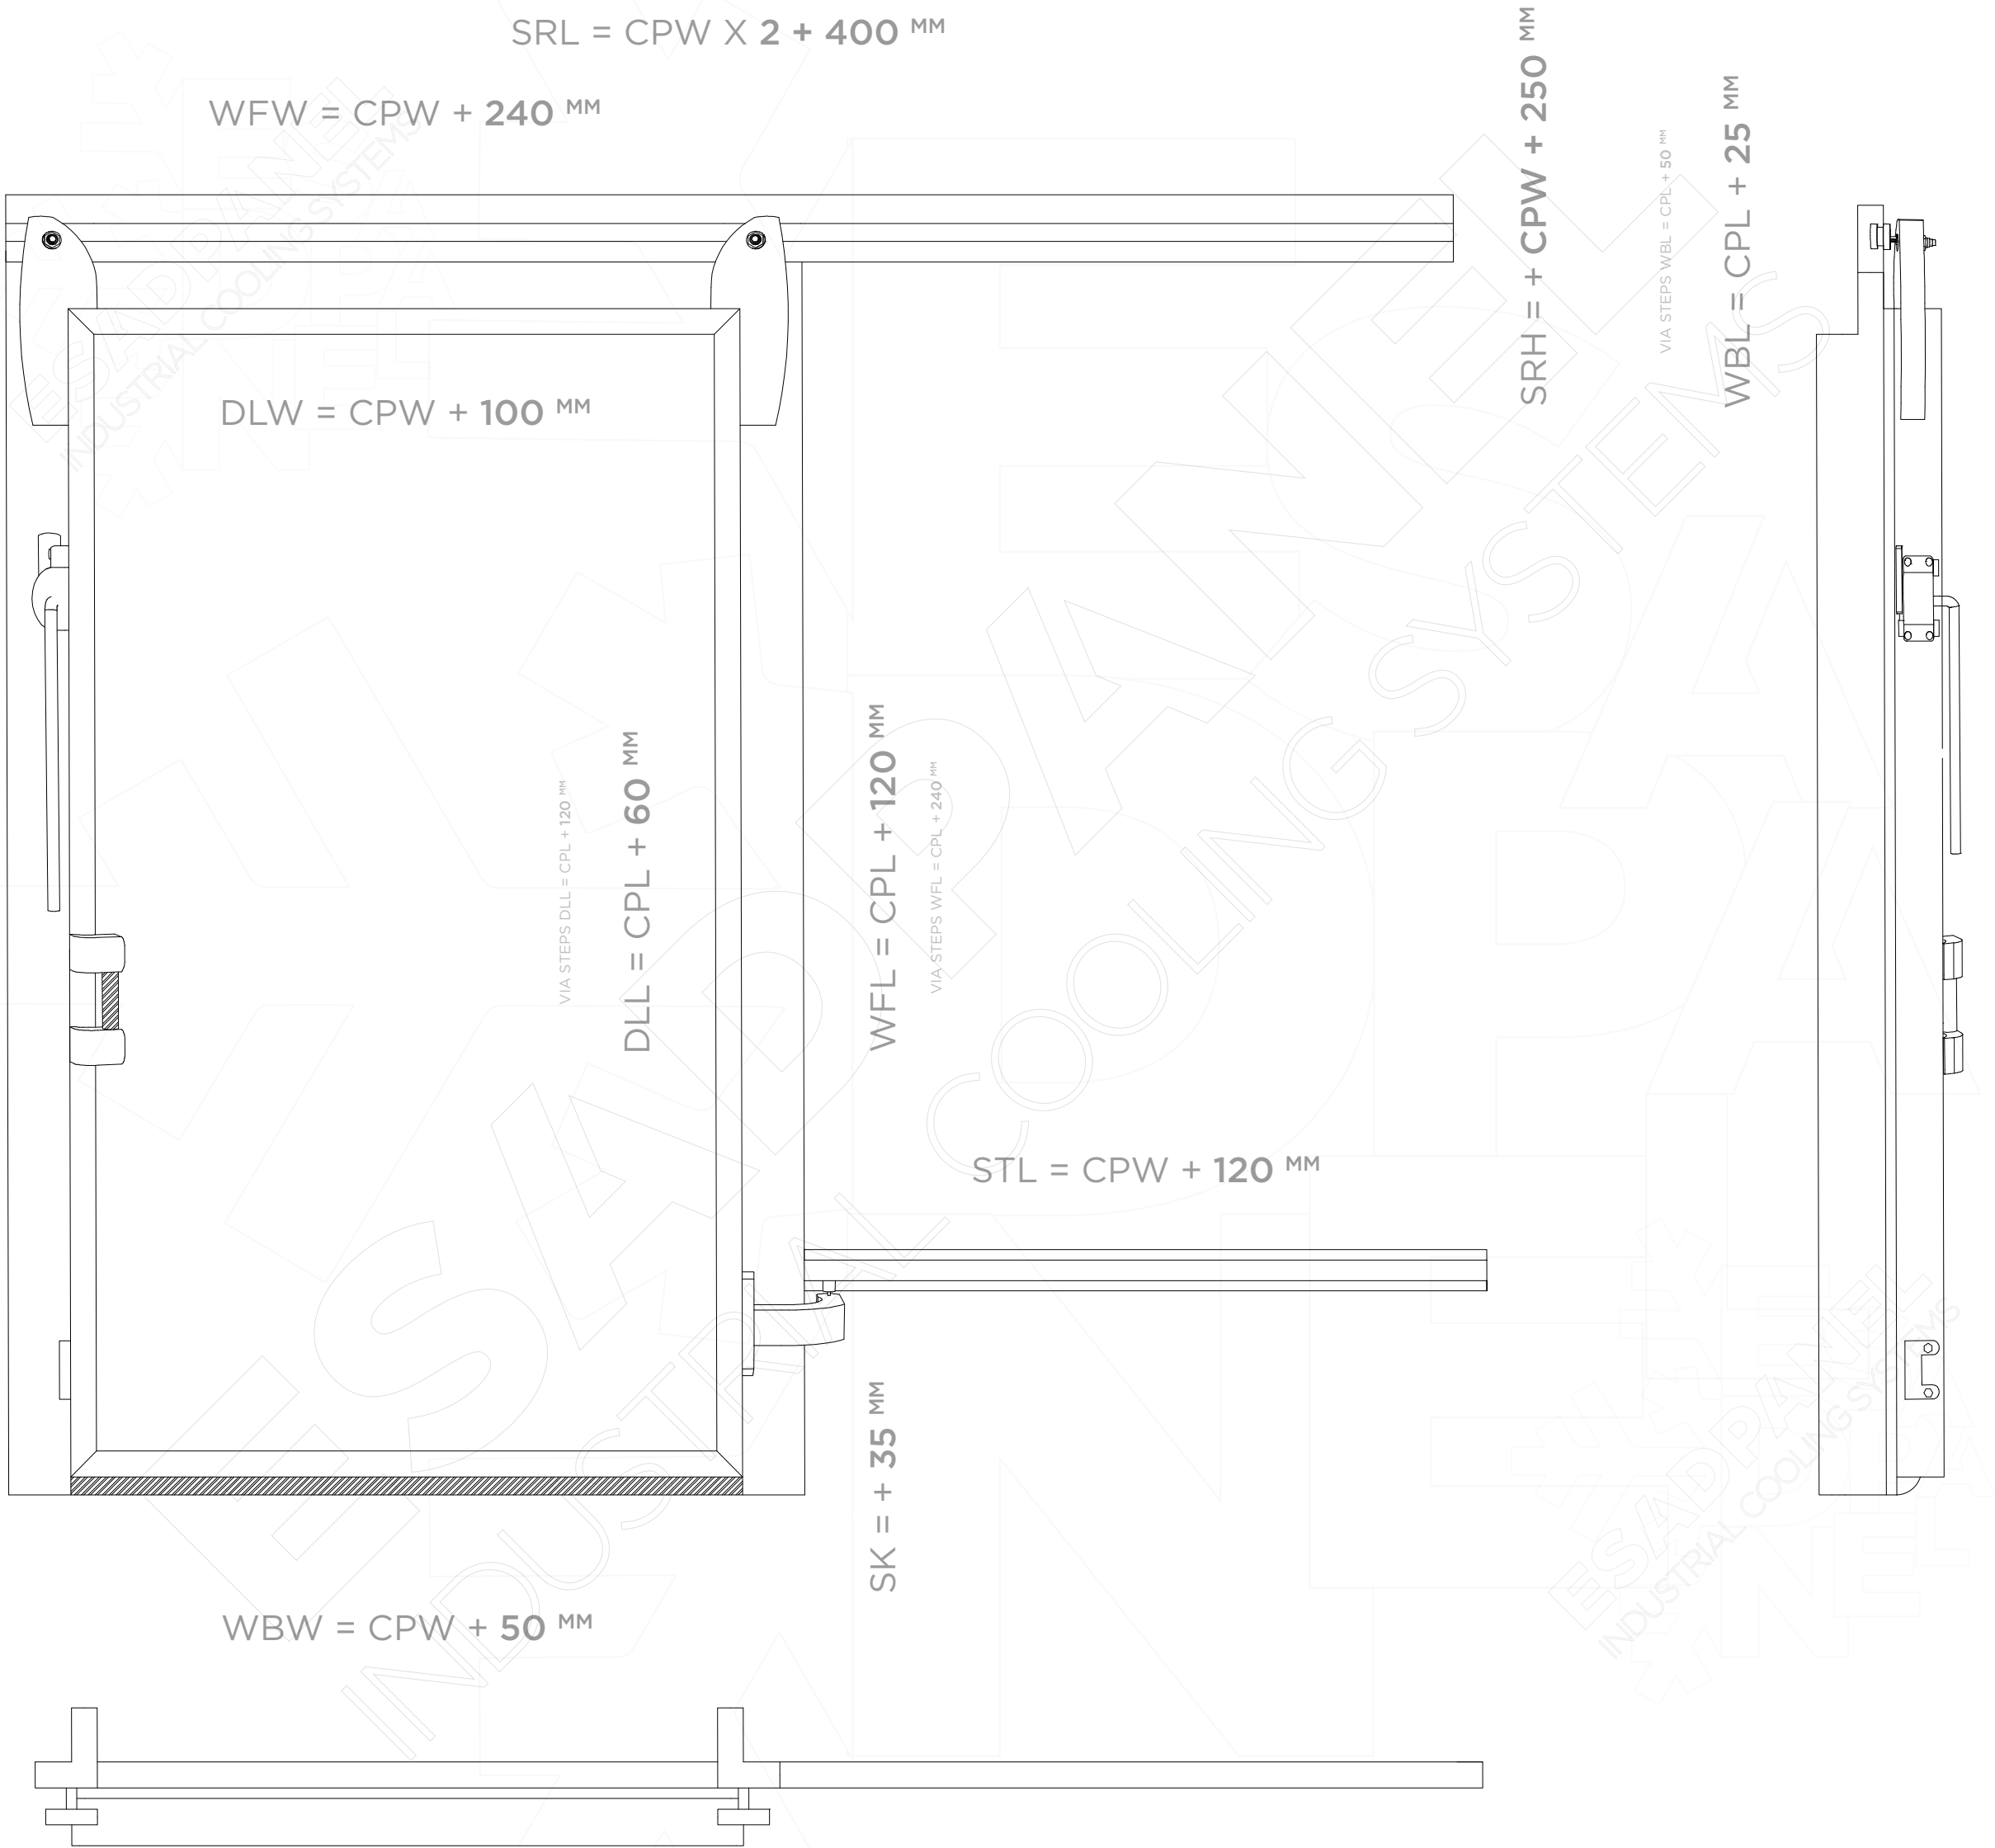


COLD STORAGE

HINGED DOOR

PVC FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

SPECS & OPTIONS	POSITIVE	NEGATIVE
LEAF THICKNESS	68 MM	92 MM
RESISTANCE	NO	INSIDE OF GASKETS
CORE MATERIAL	PUR 42 (±2) kg/m3	
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm	
COLOURS		
OPTIONAL	STEPS, BUMPERS, GLAZINGS	



Above specs can be change without noticing. Ask for more details to ESADPANEIL




COLD STORAGE
HINGED DOOR

PVC FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

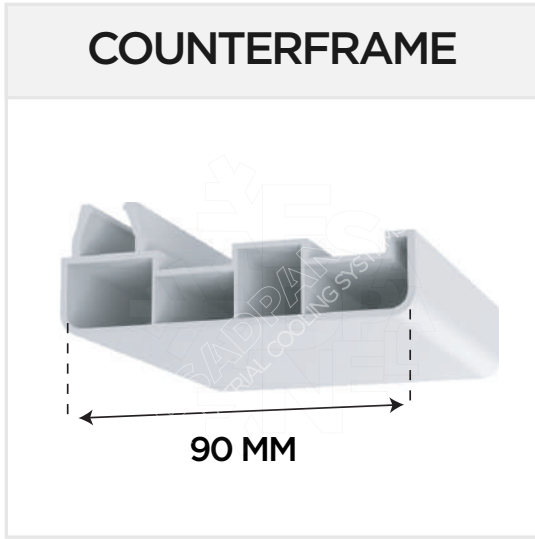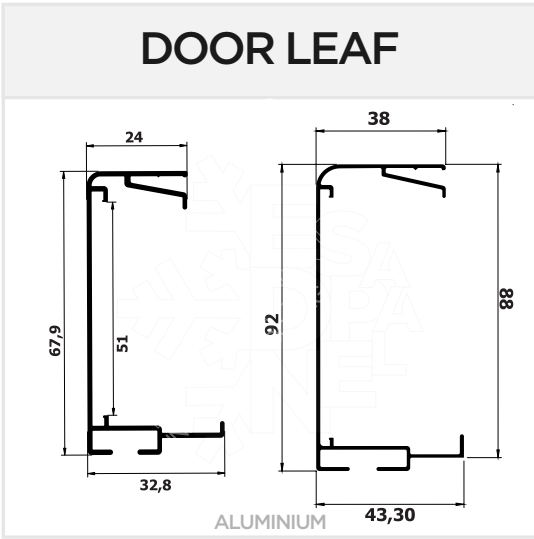

ASK FOR ALUMINIUM MODELS.

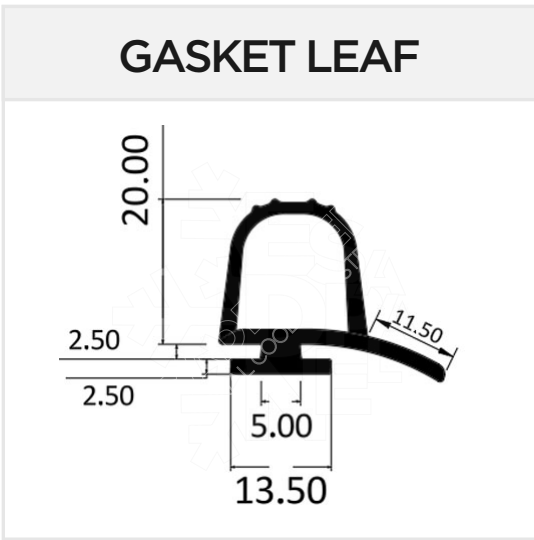

ASK FOR OTHER MODELS.



ASK FOR OTHER MODELS.



SINCE 120CM WIDTH OF THE CPW WF. UPGRADES TO SRG

COLD STORAGE **HINGED DOOR**

PVC FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.


COLD STORAGE

HINGED DOOR

PVC FRAME

Hinged doors can be produced from the smallest sizes up to 150x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	VIA STEPS WFL	+ STEPS WALL FRAME LENGTH
SK	SKIRTING HEIGHT	WBW	WALL BLANK WIDTH
		WBL	WALL BLANK LENGTH
		VIA STEPS WBL	+ STEPS WALL BLANK LENGTH

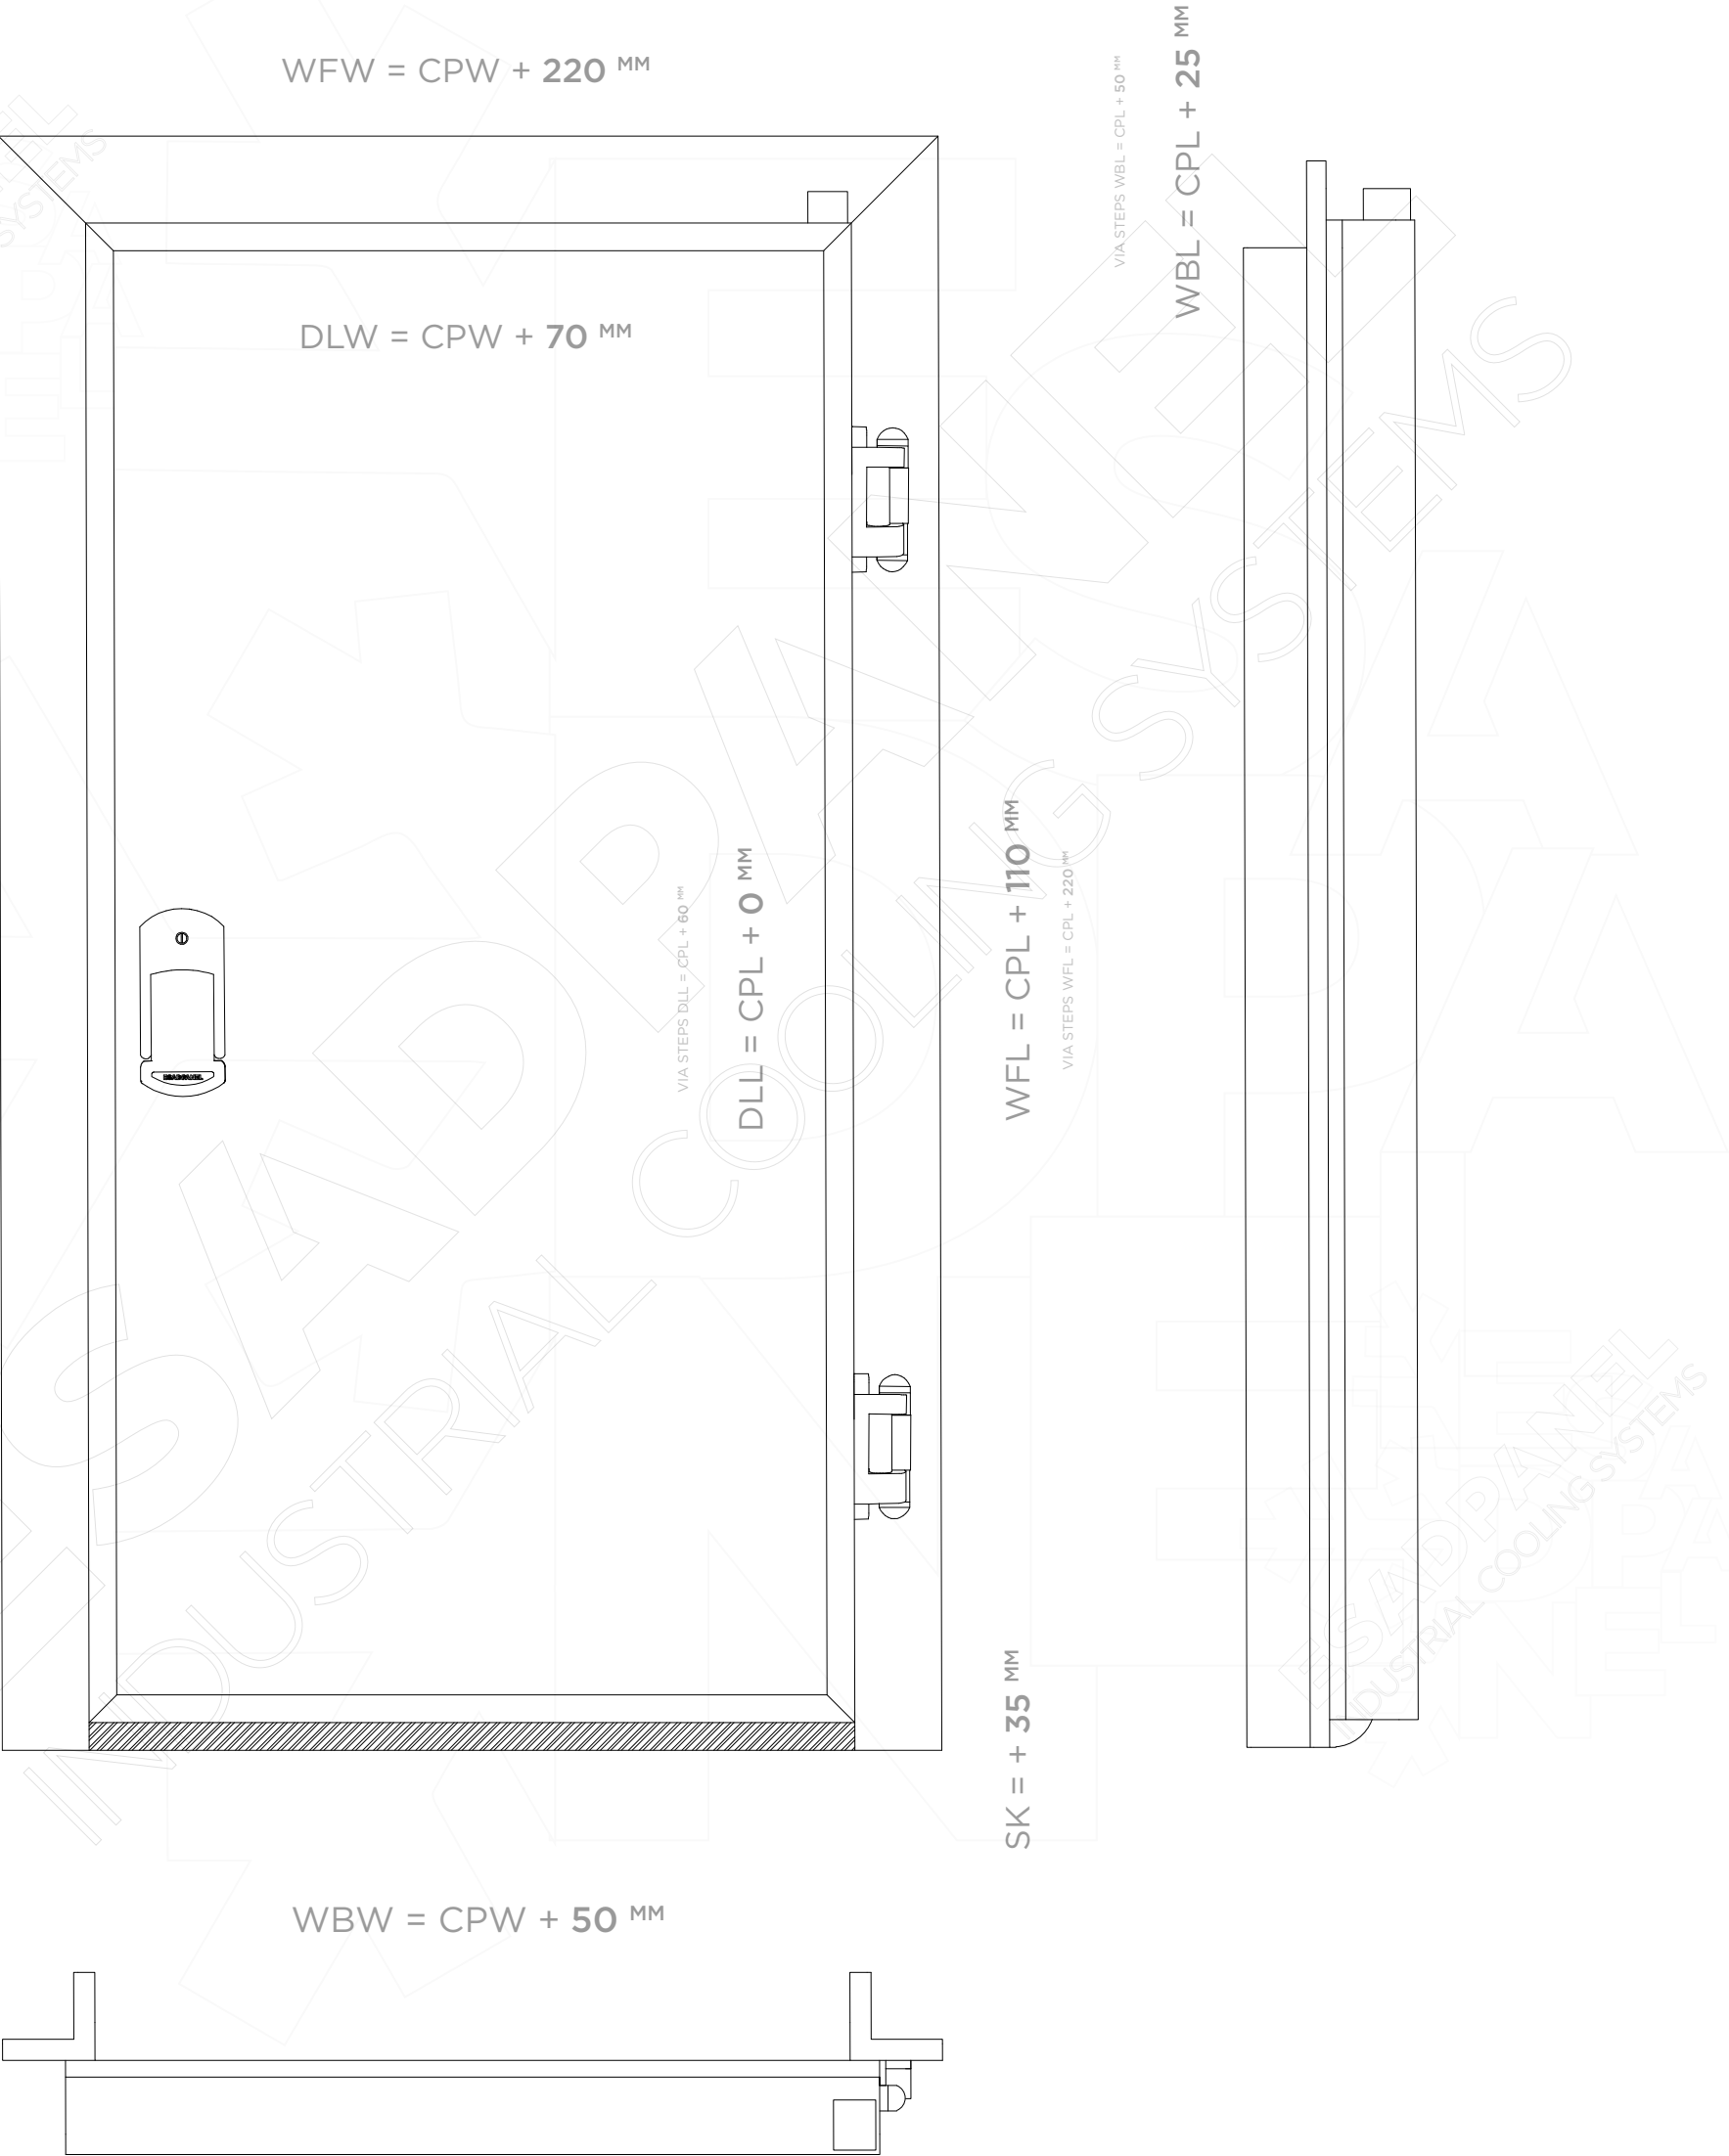


COLD STORAGE

HINGED DOOR

PANEL MOUNTED FRAME

Hinged doors can be produced from the smallest sizes up to 100x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

SPECS & OPTIONS	POSITIVE	NEGATIVE
LEAF THICKNESS	68 MM	92 MM
RESISTANCE	NO	INSIDE OF GASKETS
CORE MATERIAL	PUR 42 (±2) kg/m3	
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm	
COLOURS		
OPTIONAL	STEPS, BUMPERS, GLAZINGS	

Above specs can be change without noticing. Ask for more details to ESADPANEIL




COLD STORAGE

HINGED DOOR

PANEL MOUNTED FRAME

Hinged doors can be produced from the smallest sizes up to 100x300. Divided into two sections by Positive and Negative ones. Negative doors has thicker door leaves and heater resistances inside of the gaskets.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	STEP THICK.	STEP THICKNESS
SK	SKIRTING HEIGHT	t"	PANEL THICKNESS
		WBL	WALL BLANK LENGTH
		VIA STEPS WBL	+ STEPS WALL BLANK LENGTH

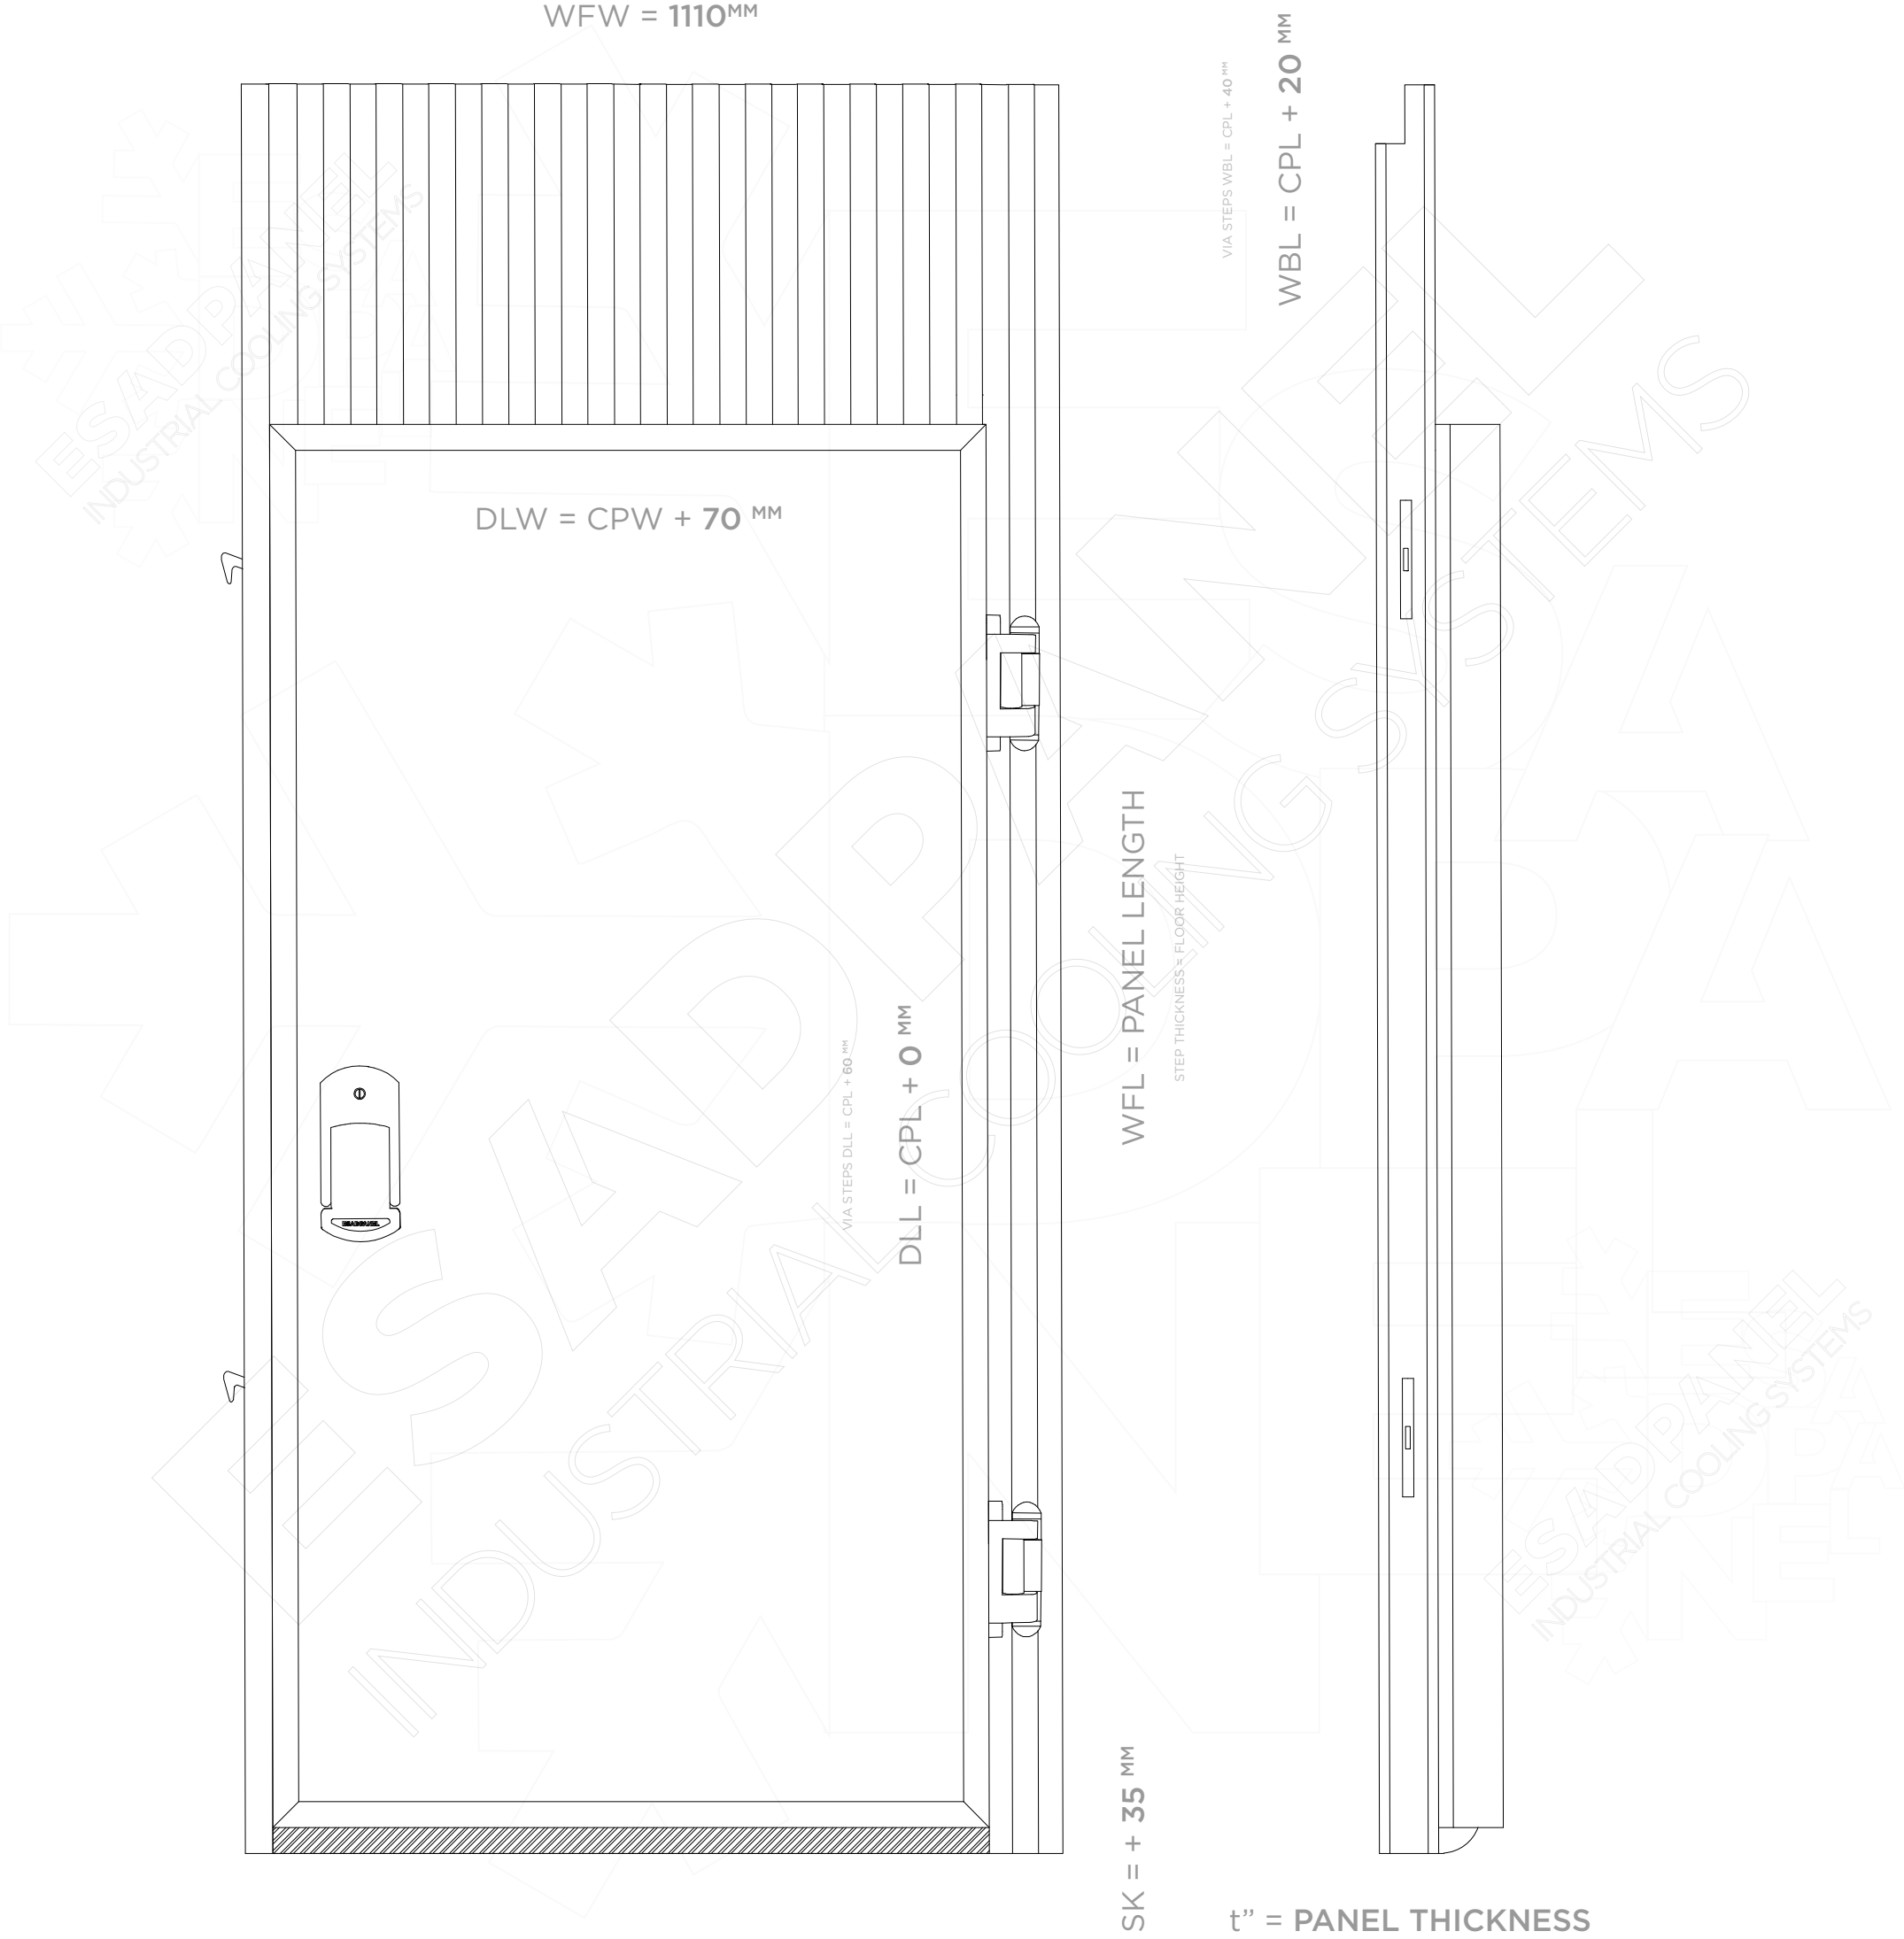


COLD STORAGE

FLIP-FLAP DOOR

SINGLE WING

Single wing bar / flip-flap doors can be produced from the smallest sizes up to 150x300. Mostly used for the areas with fast transportations. Called as cowboy, bar or flip-flap doors.

SPECS & OPTIONS	POSITIVE
LEAF THICKNESS	40 MM
RESISTANCE	NO
CORE MATERIAL	PUR 42 (±2) kg/m3
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm
COLOURS	
OPTIONAL	STEPS, BUMPERS, GLAZINGS

Above specs can be change without noticing. Ask for more details to ESADPANEIL




COLD STORAGE

FLIP-FLAP DOOR

SINGLE WING

Single wing bar / flip-flap doors can be produced from the smallest sizes up to 150x300. Mostly used for the areas with fast transportations. Called as cowboy, bar or flip-flap doors.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	VIA STEPS WFL	+ STEPS WALL FRAME LENGTH
SK	SKIRTING HEIGHT	WBW	WALL BLANK WIDTH
		WBL	WALL BLANK LENGTH
		VIA STEPS WBL	+ STEPS WALL BLANK LENGTH

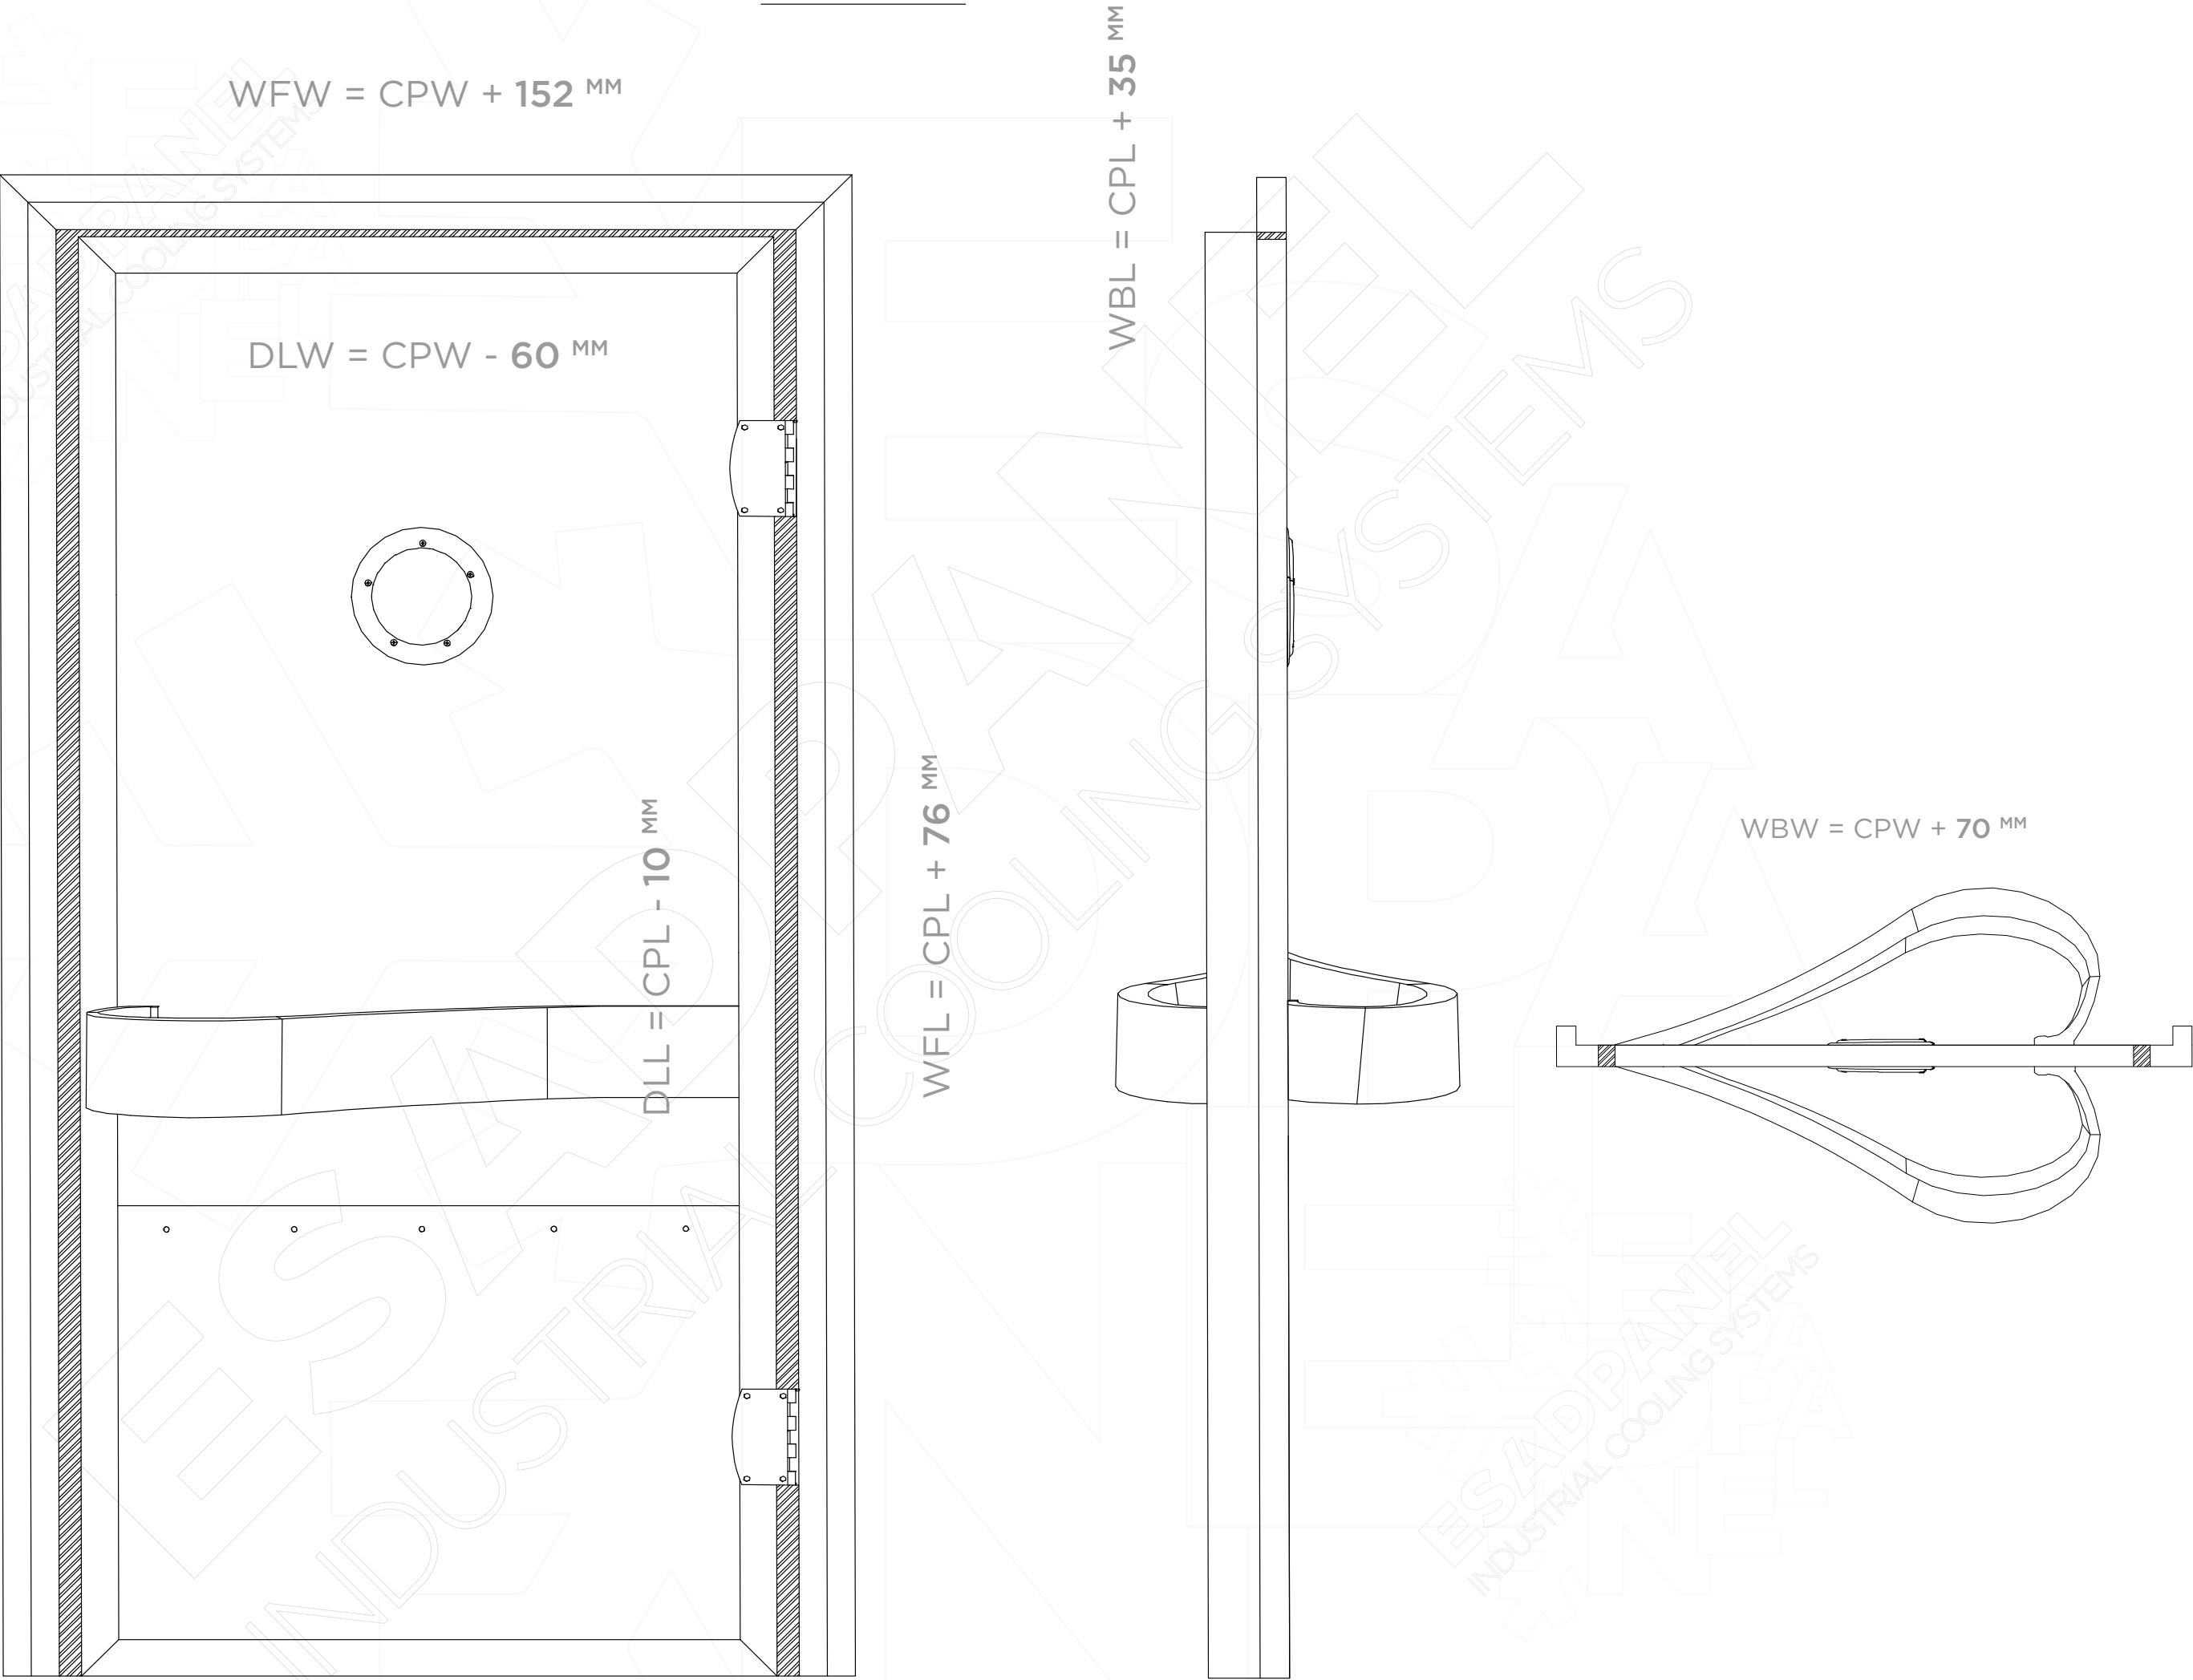


COLD STORAGE

FLIP-FLAP DOOR

DOUBLE WING

Double wing bar / flip-flap doors can be produced from the smallest sizes up to 300x300. Mostly used for the areas with fast transportations. Called as cowboy, bar or flip-flap doors.

SPECS & OPTIONS	POSITIVE
LEAF THICKNESS	40 MM
RESISTANCE	NO
CORE MATERIAL	PUR 42 (±2) kg/m3
SHEETS	P.P.G.I. - S.S304 - PVC 0.50 mm
COLOURS	
OPTIONAL	STEPS, BUMPERS, GLAZINGS

Above specs can be change without noticing. Ask for more details to ESADPANEIL




COLD STORAGE

FLIP-FLAP DOOR

DOUBLE WING

Double wing bar / flip-flap doors can be produced from the smallest sizes up to 300x300. Mostly used for the areas with fast transportations. Called as cowboy, bar or flip-flap doors.

CPW	CLEAR PASSING WIDTH	CPL	CLEAR PASSING LENGTH
DLW	DOOR LEAF WIDTH	WFW	WALL FRAME WIDTH
DLL	DOOR LEAF LENGTH	WFL	WALL FRAME LENGTH
VIA STEPS DLL	+ STEPS DOOR LEAF LENGTH	VIA STEPS WFL	+ STEPS WALL FRAME LENGTH
SK	SKIRTING HEIGHT	WBW	WALL BLANK WIDTH
		WBL	WALL BLANK LENGTH
		VIA STEPS WBL	+ STEPS WALL BLANK LENGTH

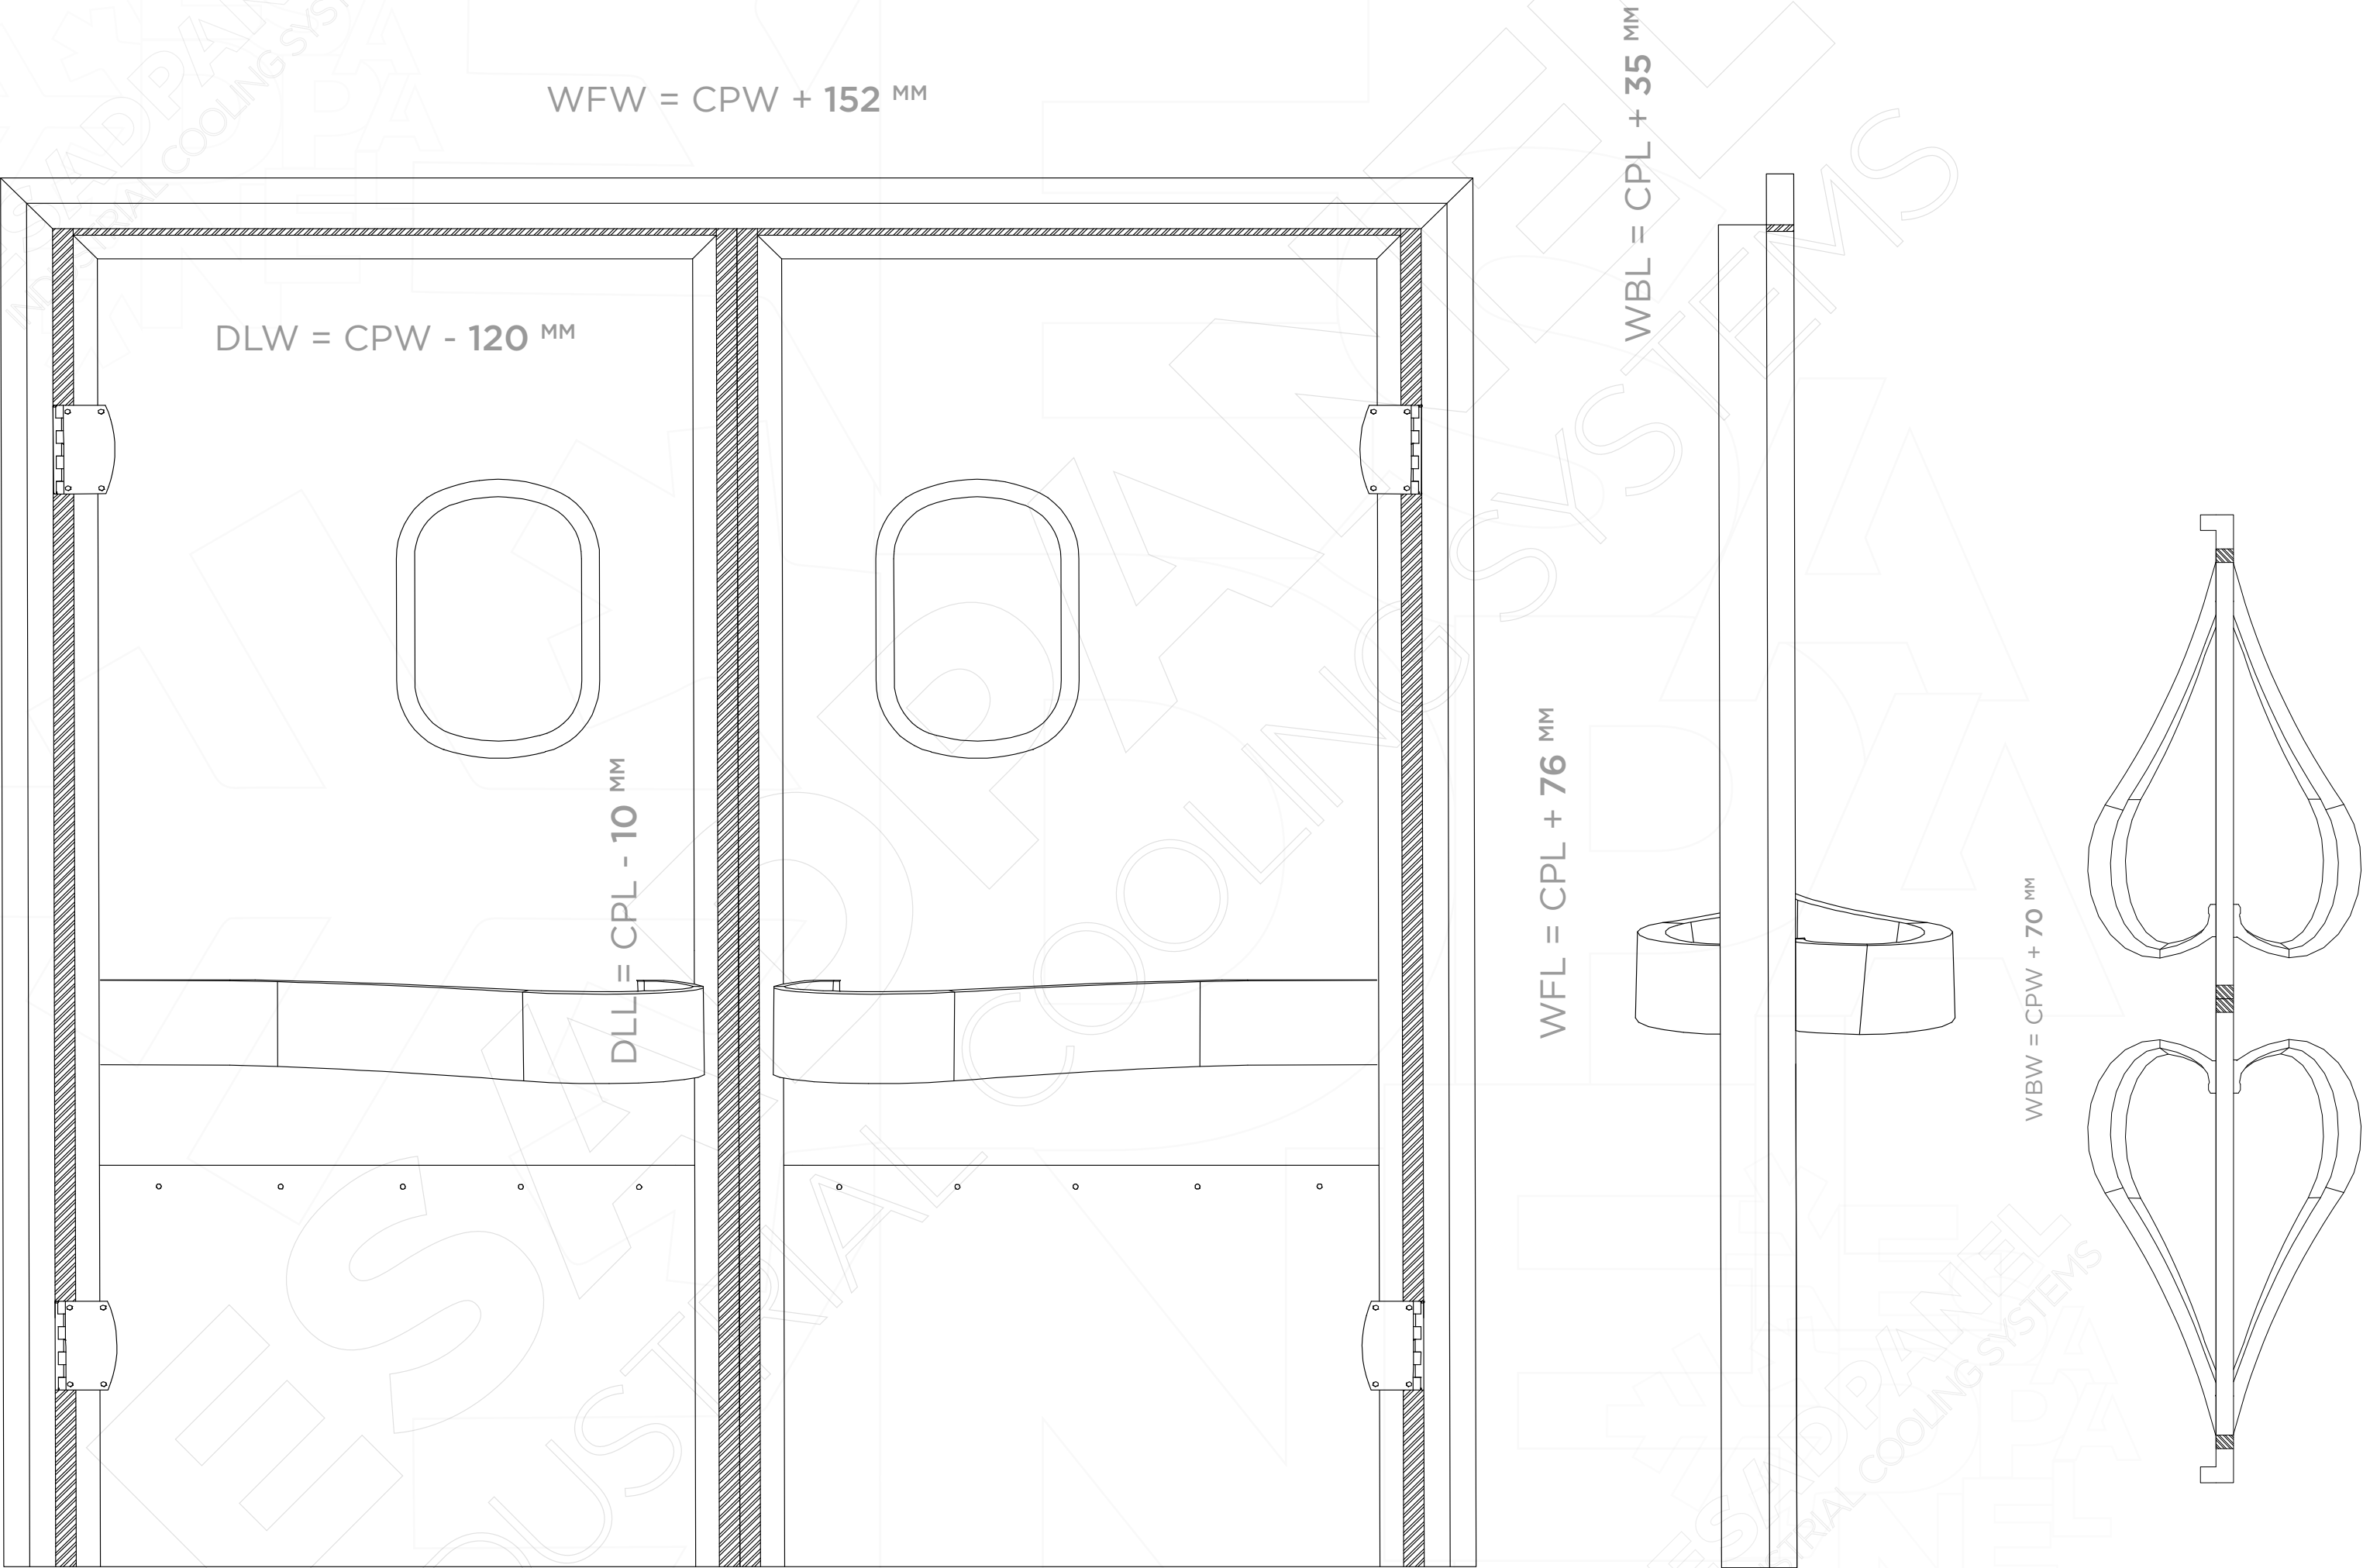



ESADPANEL

INDUSTRIAL COOLING SYSTEMS